



## Polyurethane type PU 75 A red (approx. 80° Shore A)

Our flexible  
belts

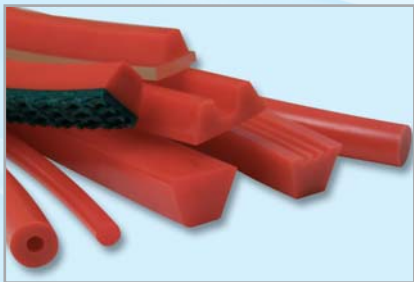

This quality is very elastic and is particularly suitable for lead-in conveyors as well as units with small deflection pulleys. This grade is especially effective in the transportation of frozen goods. The major strengths of this belting are its energy transfer and load handling abilities. Material available with rough and smooth surface.

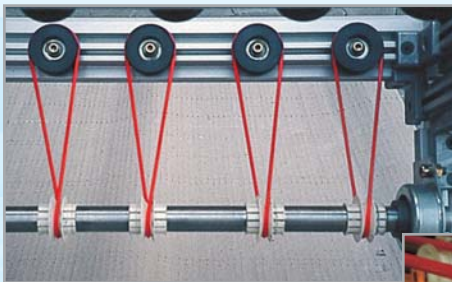

Transport system with drive via vertical shaft BEHAbelt round belt PU 75 A, 4 mm, 5/32 inch  $\varnothing$



Enamelling line with BEHAbelt PU 75 A round belts, 12.5 mm, 1/2 inch  $\varnothing$