


SR



FI

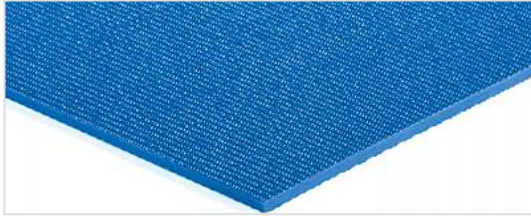

PU65A / PU55D

FBFNG750X19L

SR

SR	SR
SR	1,9 mm
SR	21 mm
SR	0.5...3%
1%SR	0,9 N/mm
1%SR	0,63 N/mm

SR	SR2
SR	2,28 kg/m ²
SR	-30°...+60°C
SR	750 mm
SR	730 mm
SR	SR

SR	SR	SR
SR	72° Shore A (±3)	55° Shore D (±3)
SR μ	0,7	0,25
SR	SR	SR
SR	0,8 mm	1,1 mm
SR	SR	SR
SR	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
SR	SR	SR
SR	SR	SR
SR	SR	2K
SR	SR	
SR	2K	

SR
REACH EC 1907/2006
EG 1935/2004
EG 10/2011
FDA (Food and Drug Administration)

SR	SR
SR	SR
SR	150/205 °C
SR	260°C ±10°C
SR	90 sek.

SR

SR - 09/2026

BEHAbelt

BEHAbelt 提供多種規格之工業用橡膠帶，適用於各種工業應用。




符合FDA/EC標準



符合X光機安全標準，不含鉛，PU SAFE



具有優異之防水性能




UV-C 耐光性



純素材料



可彎曲橡膠帶



具有優異之導電性能



具有優異之抗菌性能




具有優異之清潔性能



2K 雙組份橡膠帶




ISO 340 標準



可彎曲橡膠帶

產品系列

提供多種規格之工業用橡膠帶




PU 及 TPE 橡膠帶



PU 及 TPE 橡膠帶



PU 及 TPE 橡膠帶

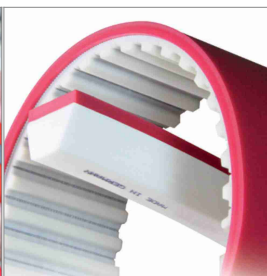

PU 及 TPE 橡膠帶



PU 橡膠帶