



Material: **SM**

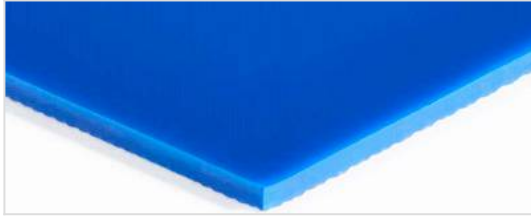

Material: **AT5**

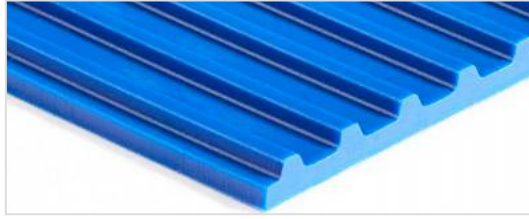

Material: **PU65A / PU80A**

Material: **FBFJG750X3L**

Material: **SM**

|               |           |
|---------------|-----------|
| Material      | SM        |
| Thickness     | 3 mm      |
| Width         | 18 mm     |
| Weight        | 2%        |
| 1% elongation | 0,5 N/mm  |
| 1% elongation | 0,35 N/mm |

|                   |               |
|-------------------|---------------|
| Material          | AT5           |
| Weight            | 2,4 kg/m²     |
| Temperature range | -20°C...+60°C |
| Width             | 700 mm        |
| Height            | 700 mm        |
| Material          | FBFJG750X3L   |

| Material                           | SM                                 | AT5                                |
|------------------------------------|------------------------------------|------------------------------------|
| Shore A (±3)                       | 72° Shore A (±3)                   | 84° Shore A (±3)                   |
| MicroClean                         | 0.8                                | 0.6                                |
| Width                              | 0,8 mm                             | 2,2 mm                             |
| Material                           | SM                                 | AT5                                |
| FDA (Food and Drug Administration) | FDA (Food and Drug Administration) | FDA (Food and Drug Administration) |
| MicroClean                         | MicroClean                         | MicroClean                         |
| 2K                                 | 2K                                 | 2K                                 |

|                                    |
|------------------------------------|
| REACH EC 1907/2006                 |
| EG 1935/2004                       |
| EG 10/2011                         |
| FDA (Food and Drug Administration) |

|                   |          |             |
|-------------------|----------|-------------|
| Material          | SM       | AT5         |
| Temperature range | n/a °C   | 260°C ±10°C |
| Pressure          | n/a bar  |             |
| Time              | n/a sek. |             |

BEHA Innovation GmbH • In den Engematten 16 • 79286 Glottertal • +49 7684 9070 • info@behabelt.com • www.behabelt.com


10/2026

## Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



UV-C resistant



2-component belts




Belts are vegan



ISO 340 certified




Belts are flexible



Belts are flexible

## Applications

Belts are used in various applications.

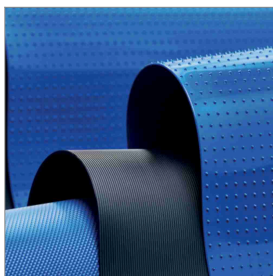

PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU belts