


格式: TGA



□□□: **AT5**

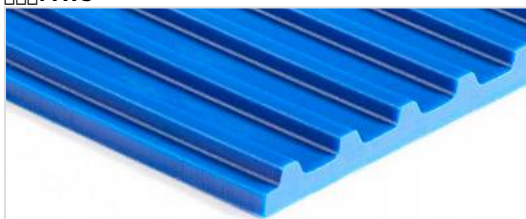

PU65A / PU80A

□□:
FBFJG750X38A

Technische Daten			
Material	Aluminium	Material	Aluminium 2024-T3
Stärke	3.8 mm	Dichte	2,8 kg/m³
Stärke	28 mm	Temperaturbereich	-20°C...+60°C
Stärke	2%	Stärke	700 mm
1% Stabilität	0,5 N/mm	Stärke	700 mm
1% Stabilität	0,35 N/mm	Stärke	700 mm

項目	規格	単位
試験温度	72° Shore A (±3)	84° Shore A (±3)
試験速度 μ	n/a	0.6
試験時間	試験時間	試験時間
試験厚さ	1.6 mm	2,2 mm
試験機	試験機TGA	AT5
試験方法	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	試験機	試験機
	試験機	MicroClean
	試験機	2K
	MicroClean	
	2K	

REACH	EC 1907/2006	EU
EG	1935/2004	EU
EG	10/2011	EU
FDA (Food and Drug Administration)		

[illegible][illegible]


□□□□□□□□□□□□□□□□ - 10/2026

Icons

BEHAbelt icons represent the various properties and features of our products.




Complies with FDA/EC standards



Electrostatically dissipative



Safe for X-ray and MRI scans (PU SAFE)




Antibacterial and antifungal



Waterproof and oil-resistant



Micro Clean certified



UV-C resistant



2-component system




Vegan



ISO 340 certified




Flexible and bendable



Flexible and bendable

Applications

BEHAbelt products are used in various applications:



PU and TPE conveyor belt



PU and TPE components



PU and TPE connector



PU and TPE V-belt



PU and TPE gear