





Material: ID

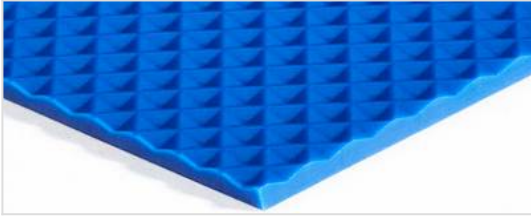

Material: AT5

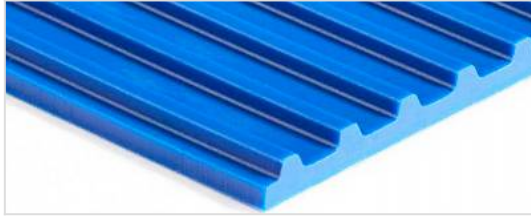

Material: PU65A / PU80A

Material: FBFJG750X3LD

Technical Data

Material	Material	Material	Material
Material	3 mm	Material	2,6 kg/m ²
Material	18 mm	Material	-20°C...+60°C
Material	2%	Material	700 mm
1%Material	0,47 N/mm	Material	700 mm
1%Material	0,33 N/mm	Material	Material

Material	Material	Material
Material	72° Shore A (±3)	84° Shore A (±3)
Material μ	n/a	0,6
Material	Material	Material
Material	0,8 mm	2,2 mm
Material	Material (ID)	AT5
Material	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
Material	Material	Material
Material	Material	MicroClean
Material	Material	2K
Material	MicroClean	
Material	2K	

Material	Material
REACH EC 1907/2006	Material
EG 1935/2004	Material
EG 10/2011	Material
FDA (Food and Drug Administration)	Material

Material


Material - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



UV-C resistant



2-component system




Belts are vegan



ISO 340 certified




Belts are flexible



Belts are flexible

Applications

Belts are used in various applications.

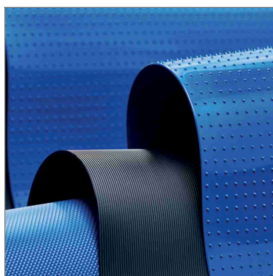

PU and TPE belts



PU and TPE belts



PU and TPE belts



V-belt PU



PU belts