




ID: ID



AT5: AT5

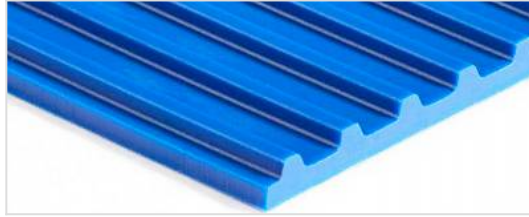

PU65A / PU95A

FBFMG750X32L



ID: ID			
Material	Material	Material	Material
3,2 mm	3,2 mm	2,4 kg/m ²	2,4 kg/m ²
25 mm	25 mm	-30°C...+40°C	-30°C...+40°C
2%	2%	700 mm	700 mm
1% N/mm	1% N/mm	700 mm	700 mm
0,48 N/mm	0,48 N/mm		

ID: ID	ID: ID	ID: ID
72° Shore A (±3)	72° Shore A (±3)	95° Shore A (±3)
0,65	0,65	0,6
0,8 mm	0,8 mm	2,4 mm
ID	ID	AT5
FDA (Food and Drug Administration)	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
2K	2K	2K
MicroClean	MicroClean	MicroClean
2K	2K	2K

ID: ID
REACH EC 1907/2006
EG 1935/2004
EG 10/2011
FDA (Food and Drug Administration)

ID: ID	ID: ID
n/a °C	n/a °C
n/a bar	n/a bar
n/a sek.	n/a sek.

ID: ID

- ID: ID
- ID: ID

ID: ID


ID: ID - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



UV-C resistant



2-component system




Belts are vegan



ISO 340 certified




Belts are flexible



Belts are flexible

Applications

Belts are used in various applications:

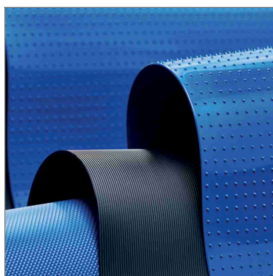

PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU belts