


□□□: □□□□□SR□



□□□: **AT5**

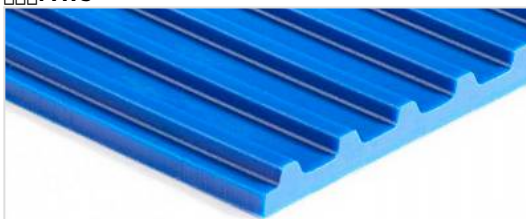

□□:
PU95A

FBFM750X22LA

Technische Daten			
Material	Aluminium	Farbe	Weiss
Stärke	2,2 mm	Gewicht	1,5 kg/m²
Profilhöhe	20 mm	Temperaturbereich	-20°C...+60°C
Verankerung	2%	Abstand	700 mm
1% Verankerung	0,68 N/mm	Abstand	700 mm
1% Verankerung	0,48 N/mm	Abstand	700 mm

項目	仕様	標準
硬さ (Shore A)	95° Shore A (±3)	95° Shore A (±3)
伸び率 (%)	0,5	0,6
密度 (g/cm³)	1.05 ± 0.02	1.05 ± 0.02
耐熱性 (°C)	n/a	n/a
耐薬品性	SR	AT5
規格	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	ISO 9001	ISO 9001
	ISO 14001	
	ISO 45001	

REACH	EC 1907/2006
EG	1935/2004
EG	10/2011
FDA (Food and Drug Administration)	

XXXXXXXXXXXXXXXXXXXX			
XXXXXXXXXX		XXXXXXXXXXXXXXXXXXXX	
XXXXXXXXXXXXXXX	n/a °C	XXXX XXXX	260°C ±10°C
XX	n/a bar		
XXXX	n/a sek.		

[illegible]


00000000000000000000 - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative



Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



UV-C resistant



2-component belts




Belts are vegan



ISO 340 certified




Belts are flexible



Belts are flexible

Applications

Belts are used in various applications:

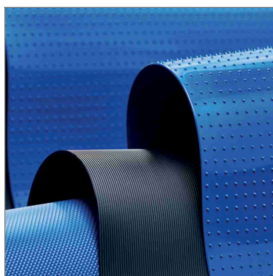

PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU belts