



□□□: □□□□ (SP)

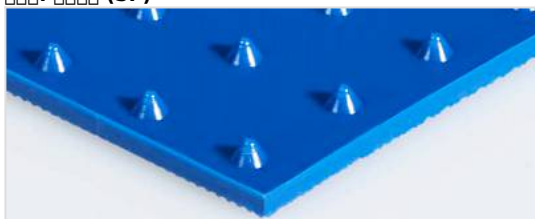

□□□: **AT5**

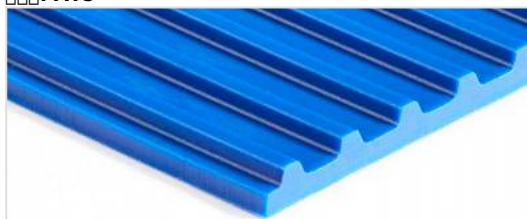

□□:
PU95A

FBFM750X3LE

Technische Daten			
Material	Aluminium	Farbe	Weiss
Stärke	3,0 mm	Gewicht	2,5 kg/m²
Stärke	30 mm	Temperaturbereich	-20°C...+60°C
Stärke	2%	Stärke	700 mm
1%Stärke	1,0 N/mm	Stärke	700 mm
1%Stärke	0,7 N/mm	Stärke	Stärke

項目	規格	規格
硬度	95° Shore A (±3)	95° Shore A (±3)
伸び率 μ	n/a	0,6
色	黒色	黒色
密度	n/a	n/a
耐熱性	SP	AT5
耐薬品性	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	耐熱性	耐熱性
	耐熱性	
	耐熱性	

REACH	EC 1907/2006	EU
EG	1935/2004	EU
EG	10/2011	EU
FDA (Food and Drug Administration)		

[illegible][illegible]


00000000000000000000 - 10/2026

Icons

BEHAbelt icons represent the various properties of the belts.




Compliant with FDA/EC



Electrostatically dissipative




Safe for X-ray and PU SAFE




Antibacterial



Waterproof



Micro Clean



UV-C resistant



2K




Vegan



ISO 340




Curved



Curved

Applications

Applications of the belts:

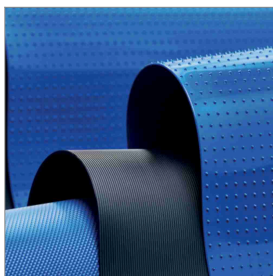


PU and TPE belts



PU and TPE belts



PU and TPE belts



V belts and PU belts



PU belts