


□□□: □□□□□**SR**□



□□□: **AT5**

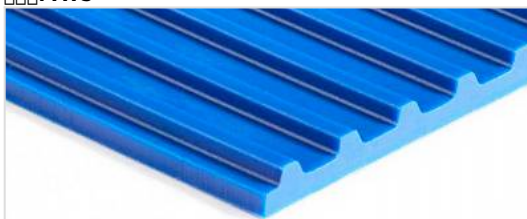

□□:
PU80A

FBFJ750X22LP

Technische Daten			
Material	Aluminium	Farbe	Weiss
Stärke	2,2 mm	Gewicht	1,5 kg/m²
Profilhöhe	15 mm	Temperaturbereich	-20°C...+60°C
Verpackungseinheit	2%	Stückzahl pro Einheit	700 mm
1% Bruchdehnung	0,39 N/mm	Stückzahl pro Einheit	700 mm
1% Bruchdehnung	0,27 N/mm	Stückzahl pro Einheit	700 mm

項目	規格	規格
硬度 (Shore A)	84° Shore A (±3)	84° Shore A (±3)
伸び率 (%)	0,5	0,6
密度 (g/cm³)	1,18 ± 0,02	1,18 ± 0,02
引張強度 (MPa)	n/a	n/a
引張伸び (%)	≥ 150	≥ 150
耐熱性 (°C)	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
耐薬品性	耐薬品	耐薬品
耐老化性	耐老化	耐老化
耐摩擦性	耐摩擦	耐摩擦

REACH	EC 1907/2006	EU
EG	1935/2004	EU
EG	10/2011	EU
FDA (Food and Drug Administration)		

[illegible][illegible]


00000000000000000000 - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative



Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are oil and water resistant



Belts are cleanable



UV-C resistant



2-component belts




Belts are vegan



ISO 340 certified




Belts are flexible



Belts are durable

Applications

Belts are used in various applications:

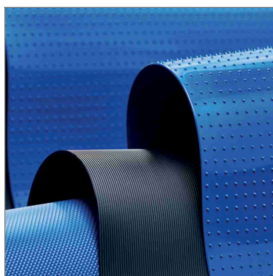

PU and TPE belts



PU and TPE belts



PU and TPE belts



PU belts



PU belts