



□□□: □□□□□□ (SG)

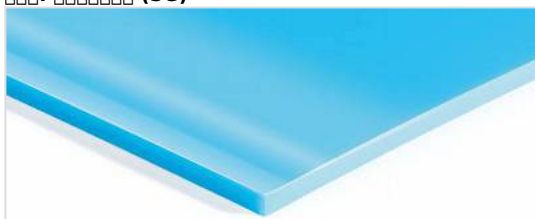

□□□: □□□□□□ (SG)

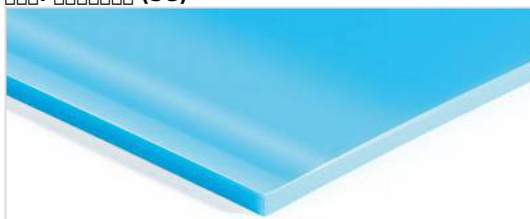

□□:
PU75A

FBFI150X16LG

Technische Daten			
Material	Aluminium	Farbe	Anthrazit
Stärke	1,6 mm	Gewicht	1,92 kg/m²
Profilhöhe	15 mm	Temperaturbereich	-30°C...+50°C
Verstellbereich	1...5%	Einbauhöhe	150 mm
1% Verstellkraft	0,34 N/mm	Einbautiefe	140 mm
1% Verstellkraft	0,24 N/mm	Einbaulänge	1000 mm

項目	規格	規格
硬度 (Shore A)	80° Shore A (±3)	80° Shore A (±3)
硬度 (Shore D)	0,7	0,7
密度 (g/cm³)	1.05 ± 0.02	1.05 ± 0.02
吸水率 (%)	n/a	n/a
拉伸強度 (MPa)	15 ± 2 (SG)	15 ± 2 (SG)
伸長率 (%)	200 ± 20 (SG)	200 ± 20 (SG)
熱穩定性 (°C)	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
電阻率 (Ω·cm)	10¹²	10¹²
表面電阻率 (Ω)	10¹²	10¹²
耐熱性 (°C)	150 ± 5	150 ± 5
耐化學性	耐水、耐油、耐酸、耐鹼	耐水、耐油、耐酸、耐鹼

REACH	EC 1907/2006	EU
EG	1935/2004	EU
EG	10/2011	EU
FDA (Food and Drug Administration)		

[illegible][illegible]


□□□□□□□□□□□□□□□□ - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



UV-C resistant



2-component belts




Belts are vegan



ISO 340 certified




Belts are flexible



Belts are flexible

Applications

Belts are used in various applications.



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU belts