





Material: **SG**

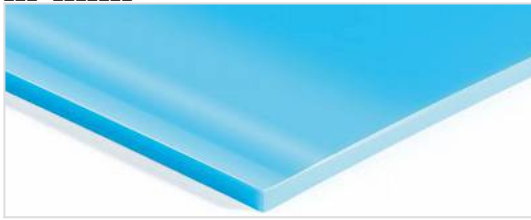

Material: **SG**

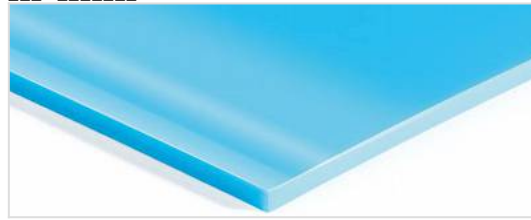

Code: **PU75A**

Code: **FBFI150X2LG**



Technical Data			
Material	SG	Material	SG
Thickness	2 mm	Density	2,4 kg/m ³
Width	20 mm	Temperature Range	-30°C...+50°C
Shore A Hardness	1...5%	Length	150 mm
1% Modulus	0,43 N/mm	Width	140 mm
1% Elongation	0,3 N/mm	Weight	0,0000 kg

Property	Value	Property	Value
Shore A Hardness	80° Shore A (±3)	Shore A Hardness	80° Shore A (±3)
Permeability μ	0,7	Permeability μ	0,7
Color	Blue	Color	Blue
Surface	n/a	Surface	n/a
Material	SG	Material	SG
Material	FDA (Food and Drug Administration)	Material	FDA (Food and Drug Administration)
Material	SG	Material	SG
Material	SG	Material	SG
Material	SG	Material	SG
Material	SG	Material	SG

Regulatory Compliance			
REACH EC 1907/2006	EG 1935/2004	EG 10/2011	FDA (Food and Drug Administration)
REACH EC 1907/2006	EG 1935/2004	EG 10/2011	FDA (Food and Drug Administration)
REACH EC 1907/2006	EG 1935/2004	EG 10/2011	FDA (Food and Drug Administration)
REACH EC 1907/2006	EG 1935/2004	EG 10/2011	FDA (Food and Drug Administration)

BEHA Innovation GmbH • In den Engematten 16 • 79286 Glottertal • Tel: +49 7684 9070 • info@behabelt.com • www.behabelt.com


Version: 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Complies with FDA/EC regulations



Electrostatically dissipative




Safe for X-ray and PU SAFE




Antibacterial



Waterproof



Micro Clean



UV-C resistant



2K




Vegan



ISO 340




Curved belt



Curved belt

Applications

Applications of BEHAbelt products:

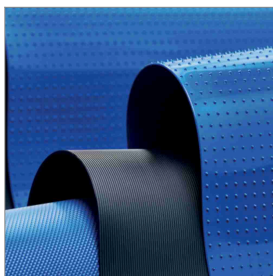


PU and TPE belt



PU and TPE belt



PU and TPE belt



PU and TPE belt



PU and TPE belt