




Material: PU80A (SG)



Material: PU80A (SG)

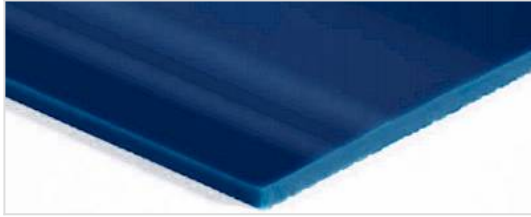

Material: **PU80A SAFE**

Material: **FBFJ150X2LGM**

Technical Data

Material	Material	Material	Material
Material	2 mm	Material	2,76 kg/m ²
Material	20 mm	Material	-20°C...+60°C
Material	1...5%	Material	150 mm
1%Material	0,6 N/mm	Material	140 mm
1%Material	0,42 N/mm	Material	Material

Material	Material	Material
Material	84° Shore A (±3)	84° Shore A (±3)
Material μ	0,65	0,65
Material	Material	Material
Material	n/a	n/a
Material	Material (SG)	Material (SG)
Material	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	Material	Material
	Material	Material
	XMaterial	XMaterial

Material	Material
REACH/EC 1907/2006Material	Material
EG 1935/2004Material	Material
EG 10/2011Material	Material
FDA (Food and Drug Administration)	Material
Material	Material
Material	Material
Material	Material

Material is a registered trademark of BEHA Innovation GmbH. All rights reserved. Material is a registered trademark of BEHA Innovation GmbH. All rights reserved.


Material - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



UV-C resistant



2-component belts




Belts are vegan



ISO 340 certified




Belts are flexible



Belts are flexible

Applications

Belts are used in various applications.

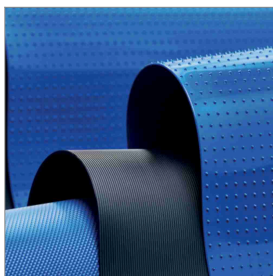

PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts with V-belt



PU belts