





Material: **SG**

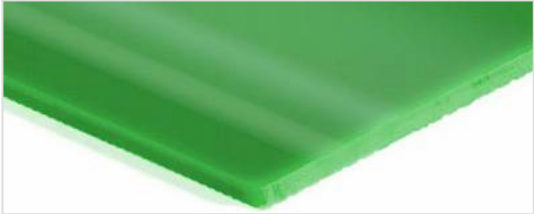

Material: **SG**

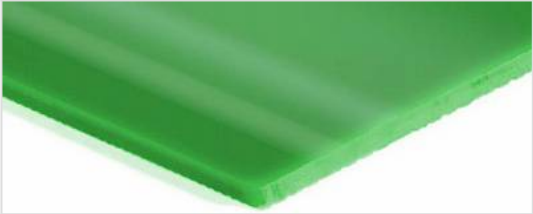

Material:
PU85A

Material:
FBFK150X16GG

Mechanical Properties			
Property	Value	Property	Value
Thickness	1,6 mm	Density	1,92 kg/m ³
Width	20 mm	Operating Temperature	-20°C...+60°C
Surface Finish	1...5%	Length	150 mm
1% Elongation	0,5 N/mm	Width	140 mm
1% Elongation	0,4 N/mm	Weight	0,0000 kg

Physical Properties		
Property	Value	Value
Shore A Hardness	88° Shore A (±3)	88° Shore A (±3)
Surface Tension	0,6	0,6
Color	Black	Black
Transparency	n/a	n/a
Material	SG	SG
Weight		

Material
FDA (Food and Drug Administration)

Thermal Properties			
Property	Value	Property	Value
Operating Temperature	180 °C	Operating Temperature	260°C ±10°C
Pressure	0,5 bar		
Time	60 sek.		

BEHAbelt is a registered trademark of BEHA Innovation GmbH. All rights reserved. The information provided here is for informational purposes only and does not constitute a contract. The actual properties of the material may vary from the information provided here.


Version: 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



Belts are UV-C resistant



Belts are 2K (two-component) belts




Belts are vegan



Belts are ISO 340 certified




Belts are flexible



Belts are flexible

Applications

Belts are used in various applications.

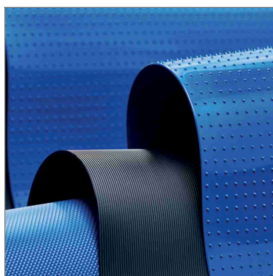

PU and TPE belts



PU and TPE belts



PU and TPE belts



Belts with V-belt profile and PU



PU belts