





SG: SG (SG)

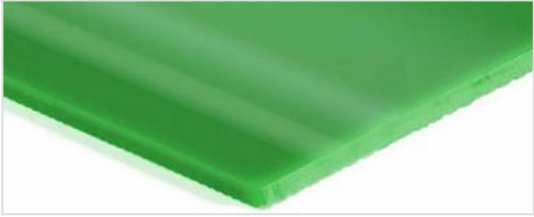

SG: SG (SG)

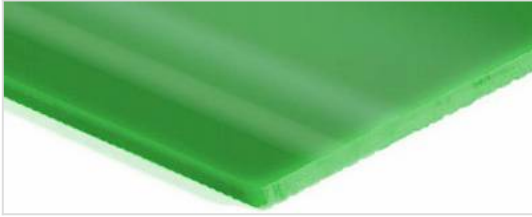

SG:
PU85A

SG:
FBFK150X3GG

SG: SG (SG)			
SG	SG	SG	SG
SG	3 mm	SG	3,6 kg/m ²
SG	35 mm	SG	-20°C...+60°C
SG	1...5%	SG	150 mm
1%SG	0,94 N/mm	SG	140 mm
1%SG	0,75 N/mm	SG	SG

SG	SG	SG
SG	88° Shore A (±3)	88° Shore A (±3)
SG μ	0,6	0,6
SG	SG	SG
SG	n/a	n/a
SG	SG (SG)	SG (SG)
SG		

SG: SG (SG)			
FDA (Food and Drug Administration)		SG: SG (SG)	
SG	180 °C	SG	260°C ±10°C
SG	0,5 bar		
SG	120 sek.		

SG: SG (SG) - 10/2026


SG: SG (SG) - 10/2026

Icons

BEHAbelt icons represent the following properties:




Complies with FDA/EC standards



Electrostatically dissipative



Complies with X-ray standards PU SAFE




Antibacterial



Waterproof



Micro Clean



UV-C resistant



2K




Vegan



ISO 340




Curved lines



Curved lines

Applications

Applications of BEHAbelt:

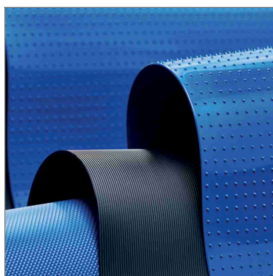


PU and TPE material roll



PU and TPE material pieces



PU and TPE material being processed



PU and TPE material being processed



PU and TPE material being processed