



□□□: □□□□□□ (SG)

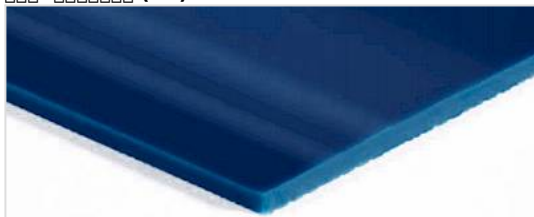

□□□: □□□□□□ (SG)

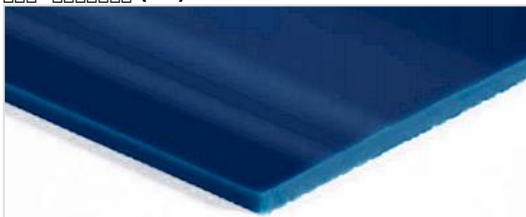

PU80A SAFE

□□:
FBFJ15016LGM

Technische Daten			
Material	Alu-Mg-Si	Material	Alu-Mg-Si
Stärke	1,6 mm	Dichte	2,2 kg/m²
Stärke	15 mm	Temperaturbereich	-20°C...+60°C
Stärke	1...5%	Stärke	150 mm
1%Stärke	0,48 N/mm	Stärke	140 mm
1%Stärke	0,34 N/mm	Stärke	Stärke

項目	規格	規格
硬度 (Shore A)	84° Shore A (±3)	84° Shore A (±3)
伸び率 (%)	0,65	0,65
密度 (g/cm³)	1,18	1,18
引張強度 (MPa)	n/a	n/a
伸び率 (%)	100 (SG)	100 (SG)
規格	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	規格	規格
	規格	規格
	X規格	X規格

REACH	EC 1907/2006	EU
EG	1935/2004	EU
EG	10/2011	EU
FDA (Food and Drug Administration)		

Übersicht über die Parameter			
Parametername		Parameterwert	
Temperatur	165 °C	Umgebungstemperatur	260°C ±10°C
Druck	0,5 bar		
Dauer	60 sek.		

[illegible]


00000000000000000000 - 10/2026

Icons

BEHAbelt icons represent the following properties:




Complies with FDA/EC standards



Electrostatic discharge (ESD) protection




Safe for X-ray imaging (X-ray safe PU SAFE)




Antibacterial properties



Waterproof



Micro clean (ISO 14644-1)



UV-C resistant



2-component system




Vegan



ISO 340 certified




Curved line



Curved line

Applications

Applications of BEHAbelt:



PU and TPE belt roll



PU and TPE belt roll



PU and TPE belt roll



PU and TPE belt roll



PU and TPE belt roll