


RI



□□□: □□□□□□□□SM□

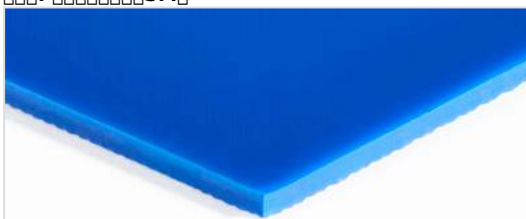

□□:
PU65A

□□:
FBSG750X20LB

Technische Daten			
Plattendicke	Plattenbreite	Plattenlänge	Plattengewicht
2 mm	2 mm	2,7 kg/m²	
15 mm		-30°C...+40°C	
1...5%		750 mm	
1% N/mm	0,21 N/mm	730 mm	
1% N/mm	0,15 N/mm		

項目	規格	規格
表面硬度 (HV0.05)	72° Shore A (±3)	72° Shore A (±3)
表面粗糙度 Ra (μm)	0,75	0,8
材質	ポリカーボネート	ポリカーボネート
寸法 (mm)	n/a	n/a
重量 (g)	約 10g (RI)	約 10g (SM)
承認機関	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	ISO 9001	ISO 9001
	ISO 13485	ISO 13485
	ISO 14001	ISO 14001
		MicroClean

REACH	EC 1907/2006
EG	1935/2004
EG	10/2011
FDA (Food and Drug Administration)	

[illegible][illegible]


XXXXXXXXXXXXXXXXXXXX - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



UV-C resistant



2-component system




Belts are vegan



ISO 340 certified




Belts are flexible



Belts are flexible

Applications

Belts are used in various applications.

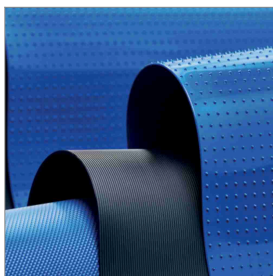

PU and TPE belts



PU and TPE belts



PU and TPE belts



V-belt PU



PU belts