



SR

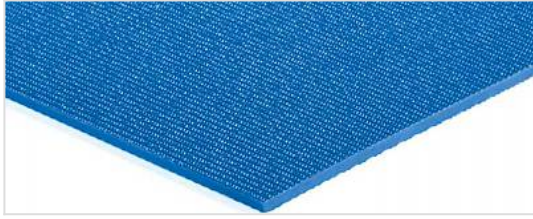

ID



PU75A

FBFI750X16LI

Technical Data

Width	1,6 mm	Weight	1,92 kg/m ²
Height	13 mm	Temperature range	-30°C...+50°C
Stretch	1...5%	Length	750 mm
1% elongation force	0,33 N/mm	Width	730 mm
1% elongation force	0,23 N/mm	Material	PU75A

Property	SR	ID
Shore A hardness	80° Shore A (±3)	80° Shore A (±3)
Permeability μ	0,55	0,5
Oil resistance	n/a	n/a
Food safety	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
UV protection	UV 3	UV 3
Cleanability	MicroClean	MicroClean

REACH EC 1907/2006
EG 1935/2004
EG 10/2011
FDA (Food and Drug Administration)

Technical Data			
Temperature	160 °C	Temperature	260°C ±10°C
Pressure	0,5 bar		
Time	60 sek.		

Notes

- SR

BEHAbelt is a registered trademark of BEHA Innovation GmbH. All rights reserved. The information provided here is for informational purposes only and does not constitute an offer. The information is subject to change without notice.


Version: 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



UV-C resistant



2-component system




Belts are vegan



ISO 340 certified




Belts are flexible



Belts are flexible

Applications

Belts are used in various applications.

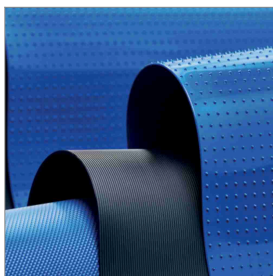

PU and TPE belts



PU and TPE belts



PU and TPE belts



V-belt PU



PU belts