




SR



ID

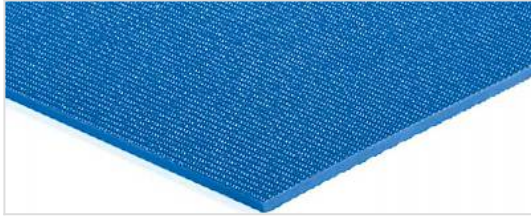

PU80A

FBFJ750X12LJ

Technical Data

Width	750 mm	Weight	1,44 kg/m ²
Thickness	12 mm	Temperature range	-20°C...+60°C
Shore A hardness	84 ± 3	Roller diameter	730 mm
1% Modulus	0,34 N/mm	Roller length	750 mm
1% Elongation	0,24 N/mm	Roller weight	1,44 kg/m ²

Property	SR	ID
Shore A hardness	84° Shore A (±3)	84° Shore A (±3)
Permeability μ	0.5	0,45
Roller diameter	n/a	n/a
Roller length	n/a	n/a
Roller weight	n/a	n/a
Roller diameter	n/a	n/a
Roller length	n/a	n/a
Roller weight	n/a	n/a
Roller diameter	n/a	n/a
Roller length	n/a	n/a
Roller weight	n/a	n/a

Property	SR	ID
Roller diameter	n/a	n/a
Roller length	n/a	n/a
Roller weight	n/a	n/a
Roller diameter	n/a	n/a
Roller length	n/a	n/a
Roller weight	n/a	n/a
Roller diameter	n/a	n/a
Roller length	n/a	n/a
Roller weight	n/a	n/a
Roller diameter	n/a	n/a
Roller length	n/a	n/a
Roller weight	n/a	n/a

BEHAbelt is a registered trademark of BEHA Innovation GmbH. All rights reserved. The information provided here is for informational purposes only and does not constitute an offer. The actual properties of the product may vary slightly from the information provided here.


Version: 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Complies with FDA/EC regulations



Electrostatically dissipative




Safe for X-ray and PU SAFE




Antibacterial



Waterproof



Micro Clean



UV-C resistant



2K




Vegan



ISO 340




Curved



Curved

Applications

Applications of BEHAbelt belts:

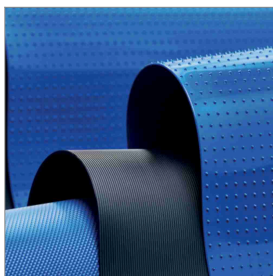


PU and TPE belt



PU and TPE belt



PU and TPE belt



PU and TPE belt



PU and TPE belt