




SR



ID

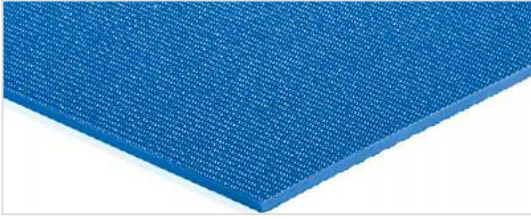

PU80A

FBFJ750X18LJ

Technical Data

Profile	SR	Profile	ID
Thickness	1,8 mm	Density	2,16 kg/m ³
Width	18 mm	Temperature range	-20°C...+60°C
Stretching	1...5%	Length	750 mm
1% Modulus	0,51 N/mm	Width	730 mm
1% Modulus	0,36 N/mm	Weight	

Property	SR	ID
Shore A Hardness	84° Shore A (±3)	84° Shore A (±3)
Permeability μ	0.5	0,45
Color	Black	Black
Surface	n/a	n/a
Profile	SR	ID
Approval	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
UV	UV	UV
Clean		MicroClean

Compliance		Performance	
REACH EC 1907/2006		Temperature	260°C ±10°C
EG 1935/2004		Pressure	0,5 bar
EG 10/2011		Time	90 sek.
FDA (Food and Drug Administration)			

BEHAbelt is a registered trademark of BEHA Innovation GmbH. All rights reserved. The information provided here is for informational purposes only and does not constitute an offer or a contract. The actual properties of the product may vary slightly from the information provided here.

Version: 10/2026

BEHAbelt

BEHAbelt 提供多種規格之工業用橡膠帶，適用於各種工業應用。




符合FDA/EC標準



符合X光機安全標準，適用於醫療設備PU SAFE



具有優異之防水性能




UV-C 耐光性優異



符合素食標準



具有優異之彎曲性能



具有優異之導電性能



具有優異之抗菌性能




具有優異之清潔性能



2K 雙組份系統，具有優異之性能




符合 ISO 340 標準



具有優異之彎曲性能

產品系列

提供多種規格之工業用橡膠帶




PU 及 TPE 工業用橡膠帶



PU 及 TPE 工業用橡膠帶



PU 及 TPE 工業用橡膠帶



具有優異之 V 型工業用橡膠帶



PU 工業用橡膠帶