





SR: SR

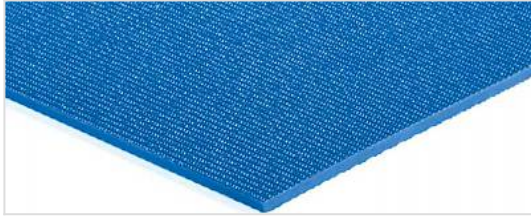

FI: FI

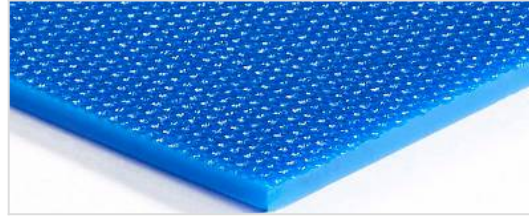

PU80A

FBFJ750X12L

#### Technical Data

|                  |           |                   |                       |
|------------------|-----------|-------------------|-----------------------|
| Thickness        | 1,2 mm    | Weight            | 1,4 kg/m <sup>2</sup> |
| Width            | 10 mm     | Temperature range | -20°C...+60°C         |
| Shore A hardness | 1...5%    | Length            | 750 mm                |
| 1% Modulus       | 0,36 N/mm | Width             | 730 mm                |
| 1% Modulus       | 0,25 N/mm | Material          | PU80A                 |

| Property         | SR                                 | FI                                 |
|------------------|------------------------------------|------------------------------------|
| Shore A hardness | 84° Shore A (±3)                   | 84° Shore A (±3)                   |
| Permeability μ   | 0.5                                | 0.5                                |
| Material         | PU80A                              | PU80A                              |
| Width            | n/a                                | n/a                                |
| Material         | SR                                 | FI                                 |
| Material         | FDA (Food and Drug Administration) | FDA (Food and Drug Administration) |
| Material         | SR                                 | FI                                 |

| Property                           | Value     |
|------------------------------------|-----------|
| REACH EC 1907/2006                 | Compliant |
| EG 1935/2004                       | Compliant |
| EG 10/2011                         | Compliant |
| FDA (Food and Drug Administration) | Compliant |

The BEHAbelt is made of polyurethane (PU) and is suitable for use in food processing environments. It is resistant to most acids, alkalis, and oils. The material is also resistant to abrasion and has a long service life.


BEHAbelt - 10/2026

## Icons

BEHAbelt icons represent the following properties:




Complies with FDA/EC regulations



Electrostatically dissipative




Complies with X-ray safe PU SAFE regulations




Antibacterial



Waterproof



Micro Clean



UV-C resistant



2K




Vegan



ISO 340




Curved lines



Curved lines

## Applications

Applications of BEHAbelt:




PU and TPE conveyor belt



PU and TPE conveyor belt



PU and TPE conveyor belt

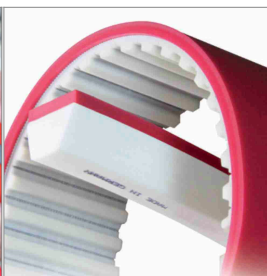

PU and TPE conveyor belt



PU and TPE conveyor belt