





SR: SR

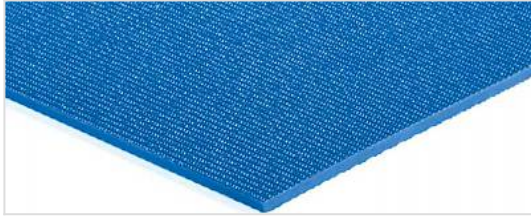

FI: FI

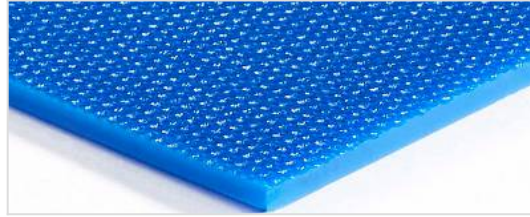

PU80A

FBFJ750X20L

SR

SR	SR
SR	2 mm
SR	20 mm
SR	1...5%
1%SR	0,6 N/mm
1%SR	0,42 N/mm

FI

FI	FI
FI	2,4 kg/m ²
FI	-20°C...+60°C
FI	750 mm
FI	730 mm
FI	FI

SR	FI	FI
SR	84° Shore A (±3)	84° Shore A (±3)
SR μ	0.5	0.5
SR	SR	FI
SR	n/a	n/a
SR	SR	FI
SR	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
SR	SR	FI

SR
REACH/EC 1907/2006
EG 1935/2004
EG 10/2011
FDA (Food and Drug Administration)

FI	FI
FI	FI
FI	160 °C
FI	0.5 bar
FI	90 sek.
FI	260°C ±10°C

SR: SR


SR - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are oil and water resistant



Belts are cleanable



UV-C resistant



2-component belts




Belts are vegan



ISO 340 certified




Belts are flexible



Belts are durable

Applications

Belts are used in various applications:



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU belts



PU belts