





SP: SP

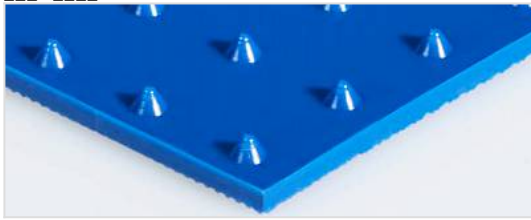

FI: FI

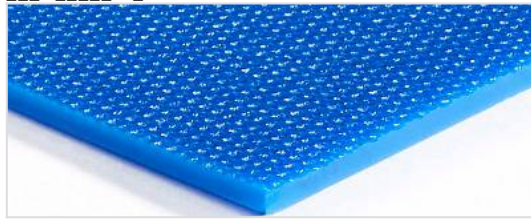

PU80A

FBFJ750X12LG

#### Technical Data

|                        |           |                   |                       |
|------------------------|-----------|-------------------|-----------------------|
| Thickness              | 1,2 mm    | Weight            | 1,5 kg/m <sup>2</sup> |
| Width                  | 12 mm     | Temperature range | -20°C...+60°C         |
| Compression set        | 1...5%    | Length            | 750 mm                |
| 1% compression modulus | 0,36 N/mm | Width             | 730 mm                |
| 1% compression modulus | 0,25 N/mm | Material          | PU80A                 |

| Property                           | Value                              | Value                              |
|------------------------------------|------------------------------------|------------------------------------|
| Shore A hardness                   | 84° Shore A (±3)                   | 84° Shore A (±3)                   |
| Permeability μ                     | n/a                                | 0.5                                |
| Material                           | PU80A                              | PU80A                              |
| Width                              | n/a                                | n/a                                |
| SP                                 | SP                                 | FI                                 |
| FDA (Food and Drug Administration) | FDA (Food and Drug Administration) | FDA (Food and Drug Administration) |
| Material                           | Material                           | Material                           |

| REACH                              |              | Technical Data |             |
|------------------------------------|--------------|----------------|-------------|
| REACH EC 1907/2006                 | EG 1935/2004 | Temperature    | 260°C ±10°C |
| FDA (Food and Drug Administration) |              | Pressure       | 0,5 bar     |
|                                    |              | Time           | 30 sek.     |

BEHA Innovation GmbH is a company of the BEHA Group. The company is located in the Engematten 16, 79286 Glottertal, Germany. The company is a member of the BEHA Group, which is a leading manufacturer of high-quality, innovative products for the food and beverage industry.

BEHA Innovation GmbH - 10/2026

## BEHAbelt

BEHAbelt 提供多種規格之工業用帶，可滿足不同之應用需求。




符合FDA/EC標準



符合X光機安全標準PU SAFE



具有防水功能




UV-C可消毒



純素製品



可彎曲工業帶



具有導電功能



具有抗菌功能




具有微清潔功能



2K雙組份工業帶




ISO 340標準



齒形工業帶

## 應用領域

BEHAbelt 工業帶可應用於多種工業領域。




PU和TPE工業帶



PU和TPE工業帶



PU和TPE工業帶

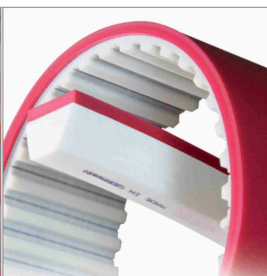

PU和TPE工業帶



PU工業帶