


Material: **SP**



Material: **FI**

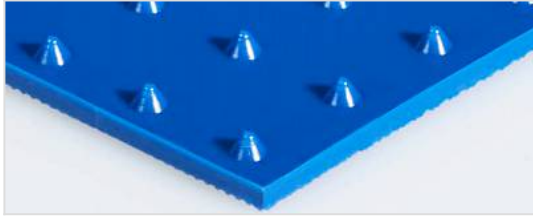

Material: **PU95A**

Material: **FBFM750X2LA**

Technical Data

Material	Material	Material	Material
Thickness	2 mm	Weight	2,6 kg/m²
Width	40 mm	Temperature range	-30°...+60°C
Shore A hardness	0.5...3%	Length	750 mm
1% Modulus	1,03 N/mm	Width	730 mm
1% Elongation	0,72 N/mm	Material	Material

Material	Material	Material
Shore A hardness	95° Shore A (±3)	95° Shore A (±3)
Modulus	n/a	0,3
Width	Material	Material
Thickness	n/a	n/a
Material	Material (SP)	Material FI
Material	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	Material	Material
	Material	Material
	Material	Material
	Material	Material

Material
REACH EC 1907/2006
EG 1935/2004
FDA (Food and Drug Administration)

Material	Material	Material	Material
Material	175 °C	Material	260°C ±10°C
Material	90 sek.		

BEHA Innovation GmbH • In den Engematten 16 • 79286 Glottertal • Tel: +49 7684 9070 • info@behabelt.com • www.behabelt.com


Version: 10/2026

Icons

BEHAbelt icons represent the following properties:




Complies with FDA/EC standards



Electrostatically dissipative




Complies with X-ray standards, PU SAFE




Antibacterial



Waterproof



Micro clean



UV-C resistant



2K system




Vegan



ISO 340




Curved



Curved

Applications

Applications of BEHAbelt:



PU and TPE conveyor belt



PU and TPE components



PU and TPE connector



PU and TPE V-belt



PU and TPE gear