



□□□: □□□□□□□□SM□

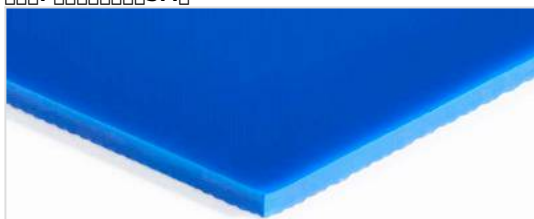

□□□: □□□□□□ (ID)

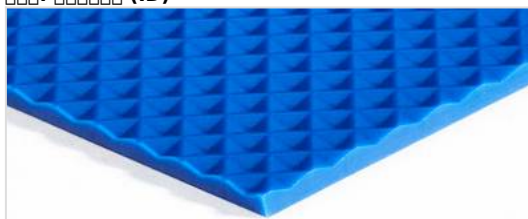

□□:
PU65A / PU75A

FBFGI750X18L

Technische Daten			
Plattendicke	Plattenbreite	Plattenlänge	Plattenmasse/m²
1,8 mm	1,8 mm	2,16 m	2,16 kg/m²
12 mm	12 mm	-30°C...+40°C	
1...5%	750 mm		
0,32 N/mm	730 mm		
0,22 N/mm			

項目	仕様	備考
硬さ (Shore A)	72° Shore A (±3)	80° Shore A (±3)
弾性率 (μ)	0,8	0,5
厚さ	0,8 mm	0,5 mm
寸法公差	±0,1 mm	±0,05 mm (ID)
試験方法	JIS K 6253 (SM)	FDA (Food and Drug Administration)
試験条件	FDA (Food and Drug Administration)	23°C
試験速度	1 mm/min	1 mm/min
試験範囲	0,1 mm ~ 1,0 mm	0,1 mm ~ 1,0 mm
試験結果	UV 透過率	UV 透過率
試験結果	0,1 mm ~ 1,0 mm	0,1 mm ~ 1,0 mm
試験結果	MicroClean	MicroClean
試験結果	2K	2K

REACH (EC 1907/2006)

EG 1935/2004

FDA (Food and Drug Administration)

[illegible][illegible]


□□□□□□□□□□□□□□ - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



UV-C resistant



2-component belts




Belts are vegan



ISO 340 certified




Belts are flexible



Belts are flexible

Applications

Belts are used in various applications.



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU belts