



Material: **SM**

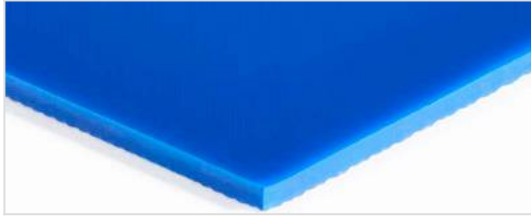

Material: **ID**

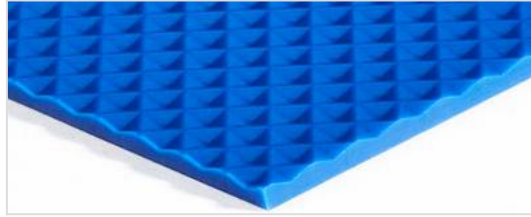

Material: **PU65A / PU80A**

Material: **FBFGJ750X18L**

Technical Data			
Material	SM	Material	ID
Thickness	1,8 mm	Weight	2,16 kg/m ²
Width	15 mm	Temperature Range	-20°C...+60°C
Shore A	1...5%	Length	750 mm
1% Modulus	0,4 N/mm	Width	730 mm
1% Elongation	0,28 N/mm	Material	FBFGJ750X18L

Mechanical Properties		
Shore A	72° Shore A (±3)	84° Shore A (±3)
Modulus	0,8	0,45
Width	0,8 mm	Material (ID)
Material	SM	FDA (Food and Drug Administration)
FDA (Food and Drug Administration)		UV
MicroClean		MicroClean
2K		2K

Regulations
REACH EC 1907/2006
EG 1935/2004
FDA (Food and Drug Administration)

Thermal Properties			
Material		Material	
Temperature	150/165 °C	Temperature	260°C ±10°C
Pressure	0,5 bar		
Time	90 sek.		

BEHA Innovation GmbH is a company of the BEHA Group. The company is located in the Engematten 16, 79286 Glottertal, Germany. The company is a member of the BEHA Group, which is a leading manufacturer of industrial belts and hoses. The company is also a member of the BEHA Group, which is a leading manufacturer of industrial belts and hoses.


Version: 10/2026

Icons

BEHAbelt icons represent the following properties:




Complies with FDA/EC standards



Electrostatic discharge (ESD) protection



Safe for X-ray imaging (X-ray safe PU SAFE)




Antibacterial properties



Waterproof



Micro clean (ISO 14644-1)



UV-C resistant



2-component system




Vegan



ISO 340 certified




Flexible



Curved

Applications

Applications of BEHAbelt:



PU and TPE conveyor belt



PU and TPE components



PU and TPE connector



PU and TPE V-belt



PU and TPE gear