


□□□: □□□□□□□**SM**□



000: 000000FI0

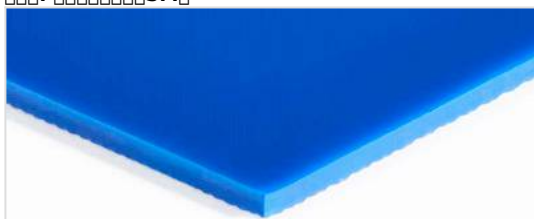

□□:
PU75A

FBFI750X16LA

Technische Daten			
Material	Aluminium	Farbe	Weiß
Stärke	1,6 mm	Gewicht	1,92 kg/m²
Profilhöhe	15 mm	Temperaturbereich	-30°C...+50°C
Verpackungseinheit	1...5%	Abstand	750 mm
1% Bruchdehnung	0,34 N/mm	Abstand	730 mm
1% Bruchdehnung	0,24 N/mm	Abstand	700 mm

項目	規格	規格
試験方法	80° Shore A (±3)	80° Shore A (±3)
試験方法 μ	0,65	0,55
試験方法	試験方法	試験方法
試験方法	n/a	n/a
試験方法	試験方法SM	試験方法F
試験方法	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	試験方法	試験方法
	試験方法	試験方法
	試験方法	試験方法
	MicroClean	試験方法
	試験方法	

REACH (EC 1907/2006)

EG 1935/2004

FDA (Food and Drug Administration)

ÖLTEMPERATUR			
ÖLTEMPERATUR		ÖLTEMPERATUR	
ÖLTEMPERATUR	155 °C	ÖLTEMPERATUR	260°C ±10°C
ÖL	0,5 bar		
ÖL	60 sek.		

[illegible]


□□□□□□□□□□□□□□ - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative



Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



Belts are UV-C resistant



Belts are 2K (two-component) belts




Belts are vegan



Belts are ISO 340 certified




Belts are flexible



Belts are flexible

Applications

Belts are used in various applications.



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts