



SM: 3 mm

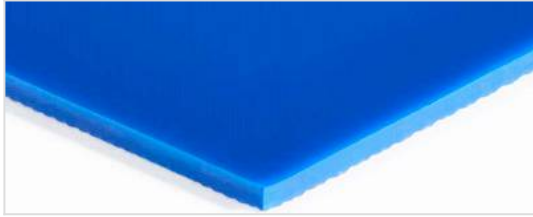

FI: 3 mm

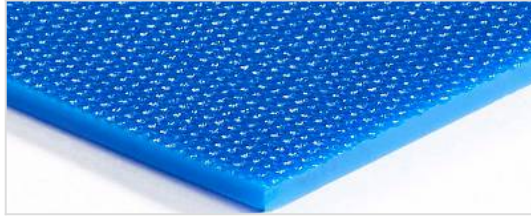

PU75A

FBFI750X30LA

Technical Data

Material	SM	Material	FI
Thickness	3 mm	Weight	3,6 kg/m²
Width	30 mm	Temperature range	-30°C...+50°C
Porosity	1...5%	Length	750 mm
1% Porosity	0,64 N/mm	Width	730 mm
1% Porosity	0,45 N/mm	Material	SM

Property	SM	FI
Shore A (±3)	80° Shore A (±3)	80° Shore A (±3)
Porosity μ	0,65	0,55
Width	30 mm	30 mm
Length	n/a	n/a
Material	SM	FI
Approval	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
MicroClean	MicroClean	MicroClean

REACH EC 1907/2006
EG 1935/2004
FDA (Food and Drug Administration)

Technical Data			
Temperature	155 °C	Temperature	260°C ±10°C
Pressure	0.5 bar		
Time	120 sek.		

BEHA Innovation GmbH • In den Engematten 16 • 79286 Glottertal • +49 7684 9070 • info@behabelt.com • www.behabelt.com


10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



UV-C resistant



2-component belts




Belts are vegan



ISO 340 certified




Belts are flexible



Belts are flexible

Applications

Belts are used in various applications.



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU belts