



□□□: □□□□□□□□SM□

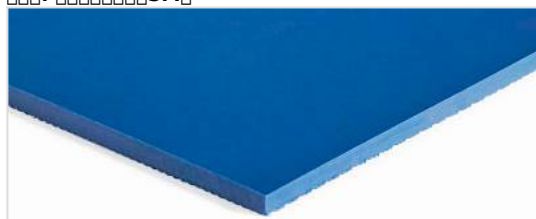

0000: 000000FI

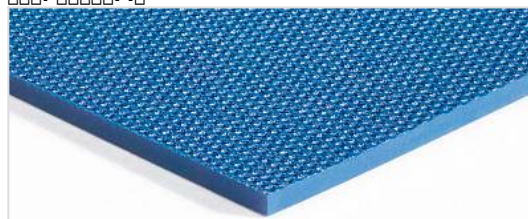

PU80A SAFE

□□:
FBFJ750X1LA

Technische Daten			
Material	Aluminium	Farbe	Anthrazit
Stärke	1 mm	Gewicht	1,38 kg/m²
Stärke	10 mm	Temperaturbereich	-20°C...+60°C
Stärke	1...5%	Stärke	750 mm
1%Stärke	0,3 N/mm	Stärke	730 mm
1%Stärke	0,21 N/mm	Stärke	Stärke

項目	規格	実測値
表面硬度 (HV0.05)	84° Shore A (±3)	84° Shore A (±3)
表面粗さ (Ra) μm	0,6	0,5
寸法公差	±0.05mm	±0.05mm
材料	n/a	n/a
試験方法	JIS S 5001 SM	JIS S 5001 FI
試験機関	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	試験機	試験機
	試験片	試験片
	X線検査	X線検査
	MicroClean	

REACH (EC 1907/2006)

EG 1935/2004

FDA (Food and Drug Administration)

Öltemperatur			
Öltemperatur		Öltemperatur	
Öltemperatur	160 °C	Öltemperatur	260°C ±10°C
Öl	0.5 bar		
Ölzeit	30 sek.		

[illegible]


00000000000000000000 - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



UV-C resistant



2-component belts




Belts are vegan



ISO 340 certified




Belts are curved



Belts are curved

Applications

Belts are used in various applications.

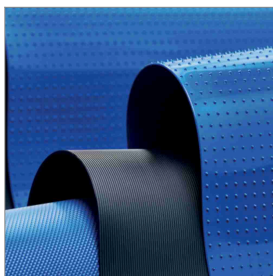

PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU belts