



□□□: □□□□□□□□SM□

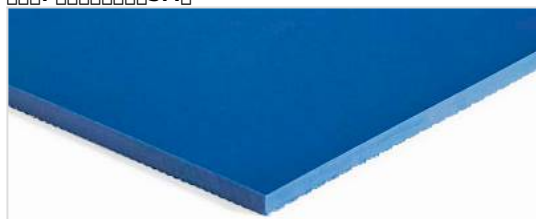

0000: 000000FI

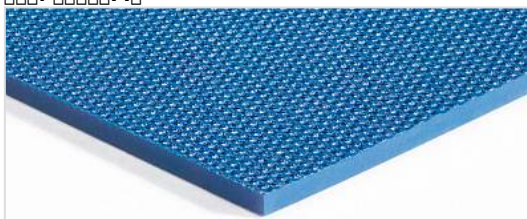

PU80A SAFE

FBFJ750X20LE

Technische Daten			
Plattendicke	Plattenbreite	Plattenlänge	Plattengewicht
2 mm	20 mm	2,76 m	2,76 kg/m²
20 mm	1...5%	-20°C...+60°C	750 mm
1% Dehnung	0,6 N/mm	730 mm	
1% Dehnung	0,42 N/mm		

項目	規格	規格
硬度	84° Shore A (±3)	84° Shore A (±3)
伸び率 μ	0,6	0,5
色	黒色	黒色
寸法	n/a	n/a
材料	シリコンSM	シリコンFI
承認	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	試験	試験
	試験	試験
	X線	X線
	MicroClean	

REACH
EC 1907/2006
EG 1935/2004
FDA (Food and Drug Administration)

[illegible][illegible]


00000000000000000000 - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



UV-C resistant



2-component belts




Belts are vegan



ISO 340 certified




Belts are flexible



Belts are flexible

Applications

Belts are used in various applications.



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts