





SM: 3 mm

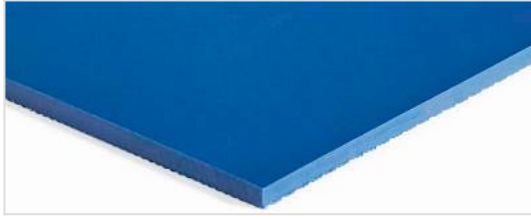

FI: 3 mm

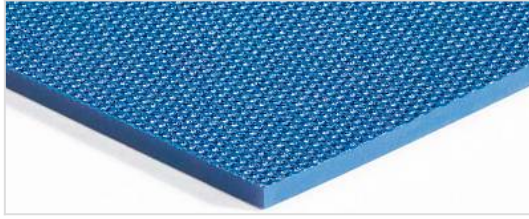

PU80A SAFE

FBFJ750X30LE

SM: 3 mm

SM	3 mm
SM	30 mm
SM	1...5%
1%SM	0,9 N/mm
1%SM	0,63 N/mm

SM	4,14 kg/m ²
SM	-20°C...+60°C
SM	750 mm
SM	730 mm
SM	SM

SM	FI	SM
SM	84° Shore A (±3)	84° Shore A (±3)
SM μ	0,6	0,5
SM	SM	SM
SM	n/a	n/a
SM	SM	SM
SM	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	SM	SM
	SM	SM
	XSM	XSM
	MicroClean	

REACH EC 1907/2006
EG 1935/2004
FDA (Food and Drug Administration)

SM	SM
SM	SM
SM	SM
SM	SM
SM	SM

SM: 3 mm


SM: 3 mm

Icons

BEHAbelt icons represent the various properties and features of the product.




Complies with FDA/EC standards



Electrostatic discharge (ESD) protection




Complies with X-ray safe standards (PU SAFE)




Antibacterial properties



Waterproof and moisture resistant



Micro clean and hygienic



UV-C resistant



2-component system




Vegan friendly



ISO 340 certified




Flexible and bendable



High flexibility

Applications

BEHAbelt is used in various applications:



PU and TPE material roll



PU and TPE material pieces



PU and TPE material being processed



PU and TPE material being processed



PU and TPE material being processed