


□□□: □□□□□□□□SM□



0000: 000000FI

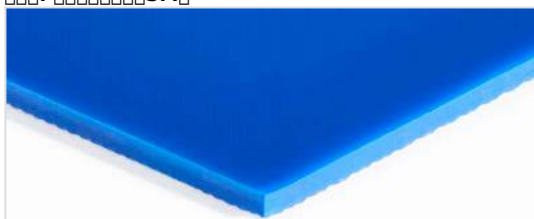

□□:
PU95A

□□:
FBFL750X10LA

Technische Daten			
Material	Aluminium	Profil	Alu-Profile
Profil	1 mm	Gewicht	1,2 kg/m²
Profil	18 mm	Temperaturbereich	-30°...+60°C
Profil	0.5...3%	Profil	750 mm
1%Profil	0,51 N/mm	Profil	730 mm
1%Profil	0,36 N/mm	Profil	Alu-Profile

項目	規格	試験方法
硬度 (Shore A)	95° Shore A (±3)	95° Shore A (±3)
伸び率 (%)	0,4	0,3
引張強度 (MPa)	0,05	0,05
引張変形率 (%)	n/a	n/a
耐熱性 (°C)	150°C (短期)	150°C (短期)
耐薬品性	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
耐水性	OK	OK
耐油性	OK	OK
耐アルコール性	OK	OK
耐消毒薬性	MicroClean	MicroClean
耐放射線性	OK	OK

REACH (EC 1907/2006)

EG 1935/2004

FDA (Food and Drug Administration)

[illegible][illegible]


□□□□□□□□□□□□□□□□ - 10/2026

Icons

BEHAbelt icons represent the various properties of the belts.




Complies with FDA/EC standards



Electrostatically dissipative




Complies with X-ray standards PU SAFE




Antibacterial



Waterproof



Micro Clean



UV-C resistant



2K




Vegan



ISO 340




Curved belt



Curved belt

Applications

Applications of the belts:

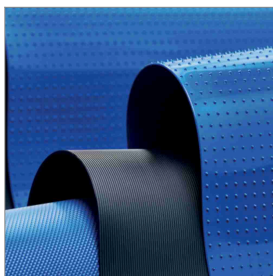

PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU belts