


□□□: □□□□□□□**SM**□



000: 00000FI0

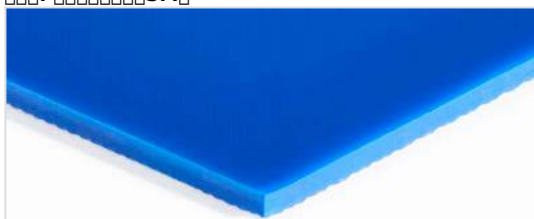

□□:
PU95A

FBFL750X16LA

Technische Daten			
Plattendicke	Plattenbreite	Plattenlänge	Plattengewicht
1,6 mm	1,6 mm	1,9 m	1,9 kg/m²
25 mm	25 mm	-30°...+60°C	
0,5...3%	750 mm		
1% N/mm	730 mm		
0,58 N/mm			

項目	規格	試験方法
硬度	95° Shore A (±3)	95° Shore A (±3)
伸び率 μ	0,4	0,3
密度	1.05g/cm³	1.05g/cm³
耐熱性	n/a	n/a
耐薬品性	耐薬品性SM	耐薬品性FI
規格	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	規格	規格
	規格	規格
	規格	規格
	規格	規格
	規格	規格

REACH (EC 1907/2006)

EG 1935/2004

FDA (Food and Drug Administration)

Özellikler			
Isıtma alanı		Isıtılacak alanın maksimum genişliği	
Isıtılacak alanın maksimum yüksekliği	175 °C	Isıtılacak alanın maksimum derinliği	260°C ±10°C
Isıtılacak alanın maksimum kalınlığı			
Isıtılacak alanın maksimum sıcaklığı	60 sek.		

[illegible]


□□□□□□□□□□□□□□ - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



Belts are UV-C resistant



Belts are 2K (two-component) belts




Belts are vegan



Belts are ISO 340 certified




Belts are flexible



Belts are flexible

Applications

Belts are used in various applications.

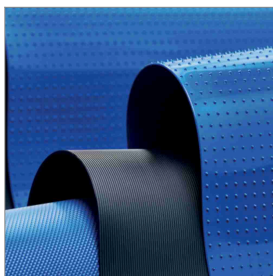

PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts