


□□□: □□□□□□□**SM**□



000: 00000FI0

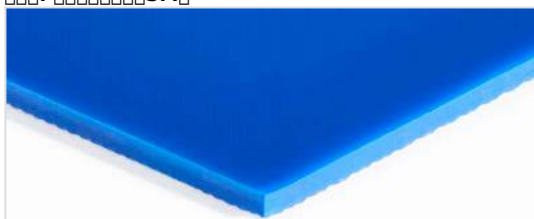

□□:
PU95A

FBFL750X20LA

Technische Daten			
Plattendicke	2 mm	Plattenbreite	2,4 kg/m²
Plattenhöhe	35 mm	Plattentemperatur	-30°...+60°C
Plattenabstand	0.5...3%	Plattenlänge	750 mm
1%Plattenabstand	1,03 N/mm	Plattenbreite	730 mm
1%Plattenabstand	0,72 N/mm	Plattenhöhe	35 mm

項目	規格	検査方法
硬度（Shore A）	95° Shore A (±3)	95° Shore A (±3)
伸び率（%）	0,4	0,3
密度（g/cm³）	1,05 ± 0,02	1,05 ± 0,02
耐熱性（℃）	n/a	n/a
耐薬品性	耐薬品性SM	耐薬品性FI
規格	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
製造方法	射出成形	射出成形
材料	ポリプロピレン	ポリプロピレン
用途	医療機器	医療機器
承認	承認済	承認済
保証	MicroClean	MicroClean

REACH (EC 1907/2006)

EG 1935/2004

FDA (Food and Drug Administration)

[illegible]

□□□□□□□□□□□□□□ - 10/2026

BEHAbelt

BEHAbelt 提供多種規格之工業用橡膠帶，適用於各種工業應用。




符合FDA/EC標準



符合X光機安全標準，適用於醫療設備PU SAFE



具有優異之防水性能




UV-C 抗紫外線



符合素食標準



具有優異之彎曲性能



具有優異之導電性能



具有優異之抗菌性能




具有優異之清潔性能



2K 雙組份系統




ISO 340 標準



具有優異之彎曲性能

應用領域

BEHAbelt 橡膠帶適用於多種工業應用。

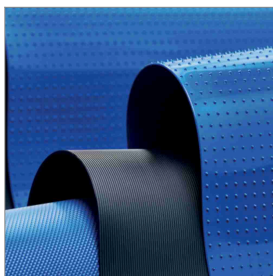


PU 及 TPE 橡膠帶



PU 及 TPE 橡膠帶



PU 及 TPE 橡膠帶



具有優異之 V 型橡膠帶 PU 橡膠帶



PU 橡膠帶