


□□□: □□□□□□□**SM**□



000: 00000FI0

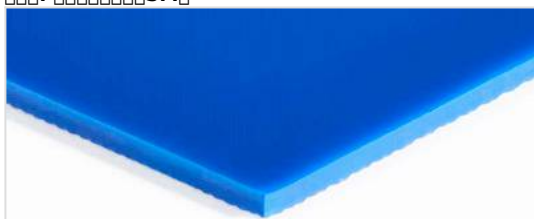

□□:
PU95A

FBFL750X30LA

Technische Daten			
Plattendicke	3 mm	Flächengewicht	3,6 kg/m²
Stärke	50 mm	Temperaturbereich	-30°...+60°C
Dehnung	0.5...3%	Stärke	750 mm
1% Dehnung	1,54 N/mm	Stärke	730 mm
1% Dehnung	1,08 N/mm	Stärke	700 mm

項目	規格	試験方法
硬度	95° Shore A (±3)	95° Shore A (±3)
伸び率 μ	0,4	0,3
密度	1.05g/cm³	1.05g/cm³
耐熱性	n/a	n/a
耐薬品性	耐薬品性SM	耐薬品性FI
規格	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	規格	規格
	規格	規格
	規格	規格
	規格	規格
	規格	規格

REACH (EC 1907/2006)

EG 1935/2004

FDA (Food and Drug Administration)

Свойства и характеристики			
Материал корпуса		Алюминий	
Температура нагрева	175 °C	Точность измерения	260°C ±10°C
Время прогрева			
Время отклика	120 сек.		

[illegible]


□□□□□□□□□□□□□□ - 10/2026

Icons

BEHAbelt icons represent the various properties and features of our products.




Complies with FDA/EC standards



Electrostatically dissipative




Safe for X-ray imaging, PU SAFE




Antibacterial



Waterproof



Micro Clean



UV-C resistant



2K system




Vegan



ISO 340




Flexible



Flexible

Applications

BEHAbelt products are used in various applications.



PU and TPE conveyor belt



PU and TPE components



PU and TPE connector



PU and TPE V-belt



PU and TPE gear