


□□□: □□□□□□□□SM□



0000: 000000FI

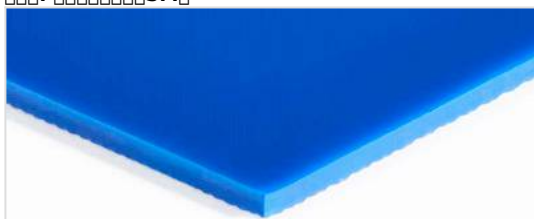

□□:
PU95A

FBFL750X40LA

Technische Daten			
Plattendicke	Plattenbreite	Plattenlänge	Plattengewicht
4 mm	4 mm	4,8 kg/m²	
75 mm		-30°...+60°C	
0.5...3%		750 mm	
1%Bruchdehnung	2,06 N/mm	730 mm	
1%Bruchdehnung	1,44 N/mm	Bruchdehnung	

項目	規格	検査方法
硬度（Shore A）	95° Shore A (±3)	95° Shore A (±3)
伸び率（%）	0,4	0,3
密度（g/cm³）	1,18 ± 0,02	1,18 ± 0,02
耐熱性（Tg）	n/a	n/a
耐薬品性	耐薬品性SM	耐薬品性FI
規格	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
製造方法	射出成形	射出成形
材料	ポリプロピレン	ポリプロピレン
用途	医療機器	医療機器
承認	承認済	承認済
保証	MicroClean	MicroClean

REACH (EC 1907/2006)

EG 1935/2004

FDA (Food and Drug Administration)

[illegible][illegible]


□□□□□□□□□□□□□□ - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Complies with FDA/EC regulations



Electrostatically dissipative




Safe for X-ray inspection, PU SAFE




Antibacterial



Waterproof



Micro clean



UV-C resistant



2-component system




Vegan



ISO 340




Curved



Curved

Applications

Applications of BEHAbelt belts:



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU belts