





Material: **SG**

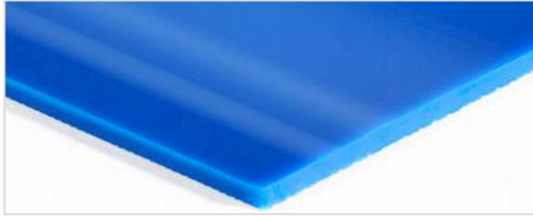

Material: **FI**

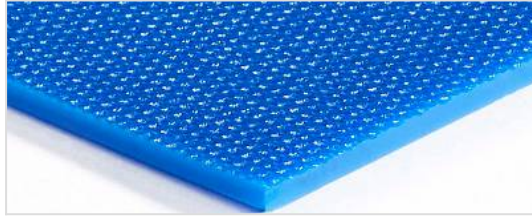

Material: **PU65A**

Material: **FBFG750X20LA**

Technical Data			
Material	SG	Material	FI
Thickness	2 mm	Density	2,4 kg/m ³
Width	12 mm	Temperature Range	-30°C...+40°C
Shore A	1...5%	Length	750 mm
1% Elongation	0,29 N/mm	Width	730 mm
1% Elongation	0,2 N/mm	Weight	0,000000

Mechanical Properties		
Shore A	72° Shore A (±3)	72° Shore A (±3)
Modulus	0,85	0,7
Hardness	n/a	n/a
Material	SG	FI
Material	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
Material	SG	FI
Material	SG	FI
Material	SG	FI
Material	SG	FI

REACH
EC 1907/2006
EG
1935/2004
FDA
(Food and Drug Administration)

Thermal Properties			
Material	SG	Material	FI
Temperature	150 °C	Temperature	250°C ±10°C
Pressure	0,5 bar		
Time	90 sek.		

BEHA Innovation GmbH • In den Engematten 16 • 79286 Glottertal • Tel: +49 7684 9070 • info@behabelt.com • www.behabelt.com


Version: 10/2026

Icons

BEHAbelt icons represent the various properties and features of our products.




Complies with FDA/EC standards



Electrostatic discharge (ESD) protection




Complies with X-ray safe standards (PU SAFE)




Antibacterial properties



Waterproof and moisture resistant



Micro clean and hygienic



UV-C resistant



2-component system




Vegan friendly



ISO 340 certified




Flexible and bendable



High flexibility

Applications

BEHAbelt products are used in various applications:




PU and TPE material roll



PU and TPE material pieces



PU and TPE material being processed

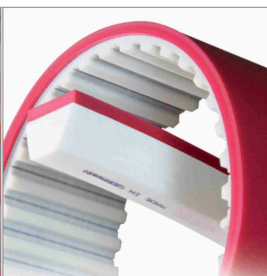

PU and TPE material being processed



PU and TPE material being processed