


□□□: □□□□□□ (SG)



000: 00000FI0

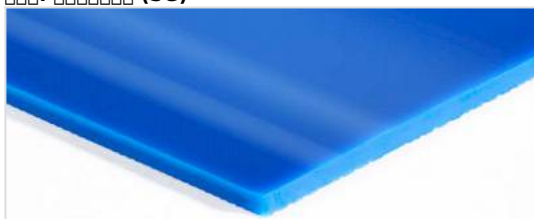

□□:
PU75A

FBFI750X20LB

Technische Daten			
Material	Aluminium	Farbe	Anodisiert
Stärke	2 mm	Gewicht	2,4 kg/m²
Stärke	20 mm	Temperaturbereich	-30°C...+50°C
Stärke	1...5%	Stärke	750 mm
1%Stärke	0,43 N/mm	Stärke	730 mm
1%Stärke	0,3 N/mm	Stärke	Stärke

項目	規格	規格
硬度 (Shore A)	80° Shore A (±3)	80° Shore A (±3)
硬度 (Shore D)	0,7	0,55
密度 (g/cm³)	1.05 ± 0.02	1.05 ± 0.02
吸水率 (%)	n/a	n/a
耐熱性 (°C)	150 (SG)	150 (FI)
耐薬品性	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	耐熱性	耐熱性
	耐熱性	耐熱性
	耐熱性	耐熱性
	耐熱性	耐熱性

REACH (EC 1907/2006)

EG 1935/2004

FDA (Food and Drug Administration)

[illegible][illegible]


00000000000000000000 - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



UV-C resistant



2-component belts




Belts are vegan



ISO 340 certified




Belts are flexible



Belts are flexible

Applications

Belts are used in various applications.



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU belts