





Material: **SG**

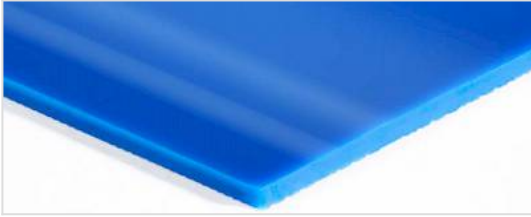

Material: **SG**

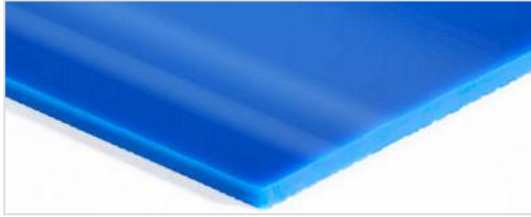

Material: **PU95A**

Material: **FBFL750X20LC**

Technical Data

Material	Material	Material	Material
Thickness	2 mm	Weight	1,8 kg/m ²
Width	35 mm	Temperature range	-20°C...+60°C
Shore A hardness	0.5...3%	Length	750 mm
1% Modulus	1,03 N/mm	Width	730 mm
1% Modulus	0,72 N/mm	Material	Material

Material	Material	Material
Material	95° Shore A (±3)	95° Shore A (±3)
Material μ	0,45	0,45
Material	Material	Material
Material	n/a	n/a
Material	Material (SG)	Material (SG)
Material	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	Material	Material
	Material	Material
	Material	Material

Material
REACH/EC 1907/2006/2008
EG 1935/2004/2008
FDA (Food and Drug Administration)

Material			
Material	Material	Material	Material
Material	175 °C	Material	260°C ±10°C
Material			
Material	90 sek.		

Material is a registered trademark of BEHA Innovation GmbH. All rights reserved. Material is a registered trademark of BEHA Innovation GmbH. All rights reserved.


Material - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



UV-C resistant



2-component belts




Belts are vegan



ISO 340 certified




Belts are curved



Belts are curved

Applications

Belts are used in various applications.



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU belts