



□□□: □□□□□□ (SG)

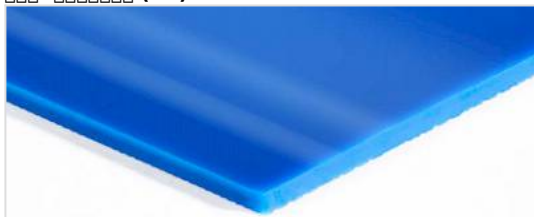

□□□: □□□□□□ (SG)

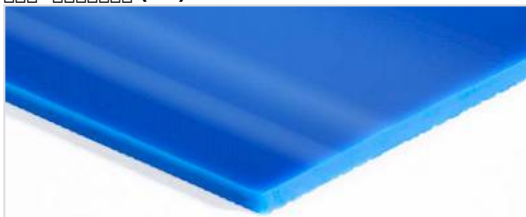

□□:
PU95A

FBFL750X30LC

Technische Zeichnung			
Bezeichnung	Maßstab	Material	Dichte
Platte	3 mm	Alu	2,7 kg/m³
Platte	50 mm	Alu	-20°C...+60°C
Platte	0.5...3%	Platte	750 mm
1%Platte	1,54 N/mm	Platte	730 mm
1%Platte	1,08 N/mm	Platte	Platte

項目	規格	備考
硬度 (Shore A)	95° Shore A (±3)	95° Shore A (±3)
伸び率 (%)	0,45	0,45
密度 (g/cm³)	1,18 ± 0,02	1,18 ± 0,02
耐熱性 (°C)	n/a	n/a
耐薬品性	耐薬品性 (SG)	耐薬品性 (SG)
規格	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	規格	規格
	規格	規格
	規格	規格

REACH (EC 1907/2006)

EG 1935/2004

FDA (Food and Drug Administration)

Свойства и характеристики			
Материал корпуса		Алюминий	
Температура нагрева	175 °C	Температура окружающей среды	260°C ±10°C
Время нагрева			
Время работы	120 sek.		

[illegible]


00000000000000000000 - 10/2026

Icons

BEHAbelt icons represent the various properties of the belts.




Complies with FDA/EC standards



Electrostatically dissipative




Complies with X-ray standards PU SAFE




Antibacterial



Waterproof



Micro Clean



UV-C resistant



2K




Vegan



ISO 340




Curved



Curved

Applications

Applications of the belts:




PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU belts