





Material: **SG**

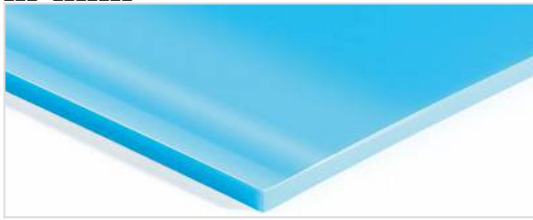

Material: **SG**

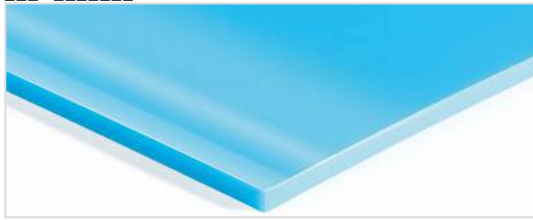

Material: **PU95A**

Material: **FBFL750X30LG**

| Mechanical Properties |           |                   |                       |
|-----------------------|-----------|-------------------|-----------------------|
| Material              | Material  | Material          | Material              |
| Thickness             | 3 mm      | Density           | 2,7 kg/m <sup>3</sup> |
| Width                 | 50 mm     | Temperature Range | -20°C...+60°C         |
| Shore A Hardness      | 0.5...3%  | Length            | 750 mm                |
| 1% Modulus            | 1,54 N/mm | Width             | 730 mm                |
| 1% Modulus            | 1,08 N/mm | Weight            | Weight                |

| 項目    | 仕様                                 | 単位                                 |
|-------|------------------------------------|------------------------------------|
| 試験方法  | 95° Shore A (±3)                   | 95° Shore A (±3)                   |
| 試験値 μ | 0,45                               | 0,45                               |
| 色     | 黒色                                 | 黒色                                 |
| 試験値   | n/a                                | n/a                                |
| 試験値   | 試験値 (SG)                           | 試験値 (SG)                           |
| 試験値   | FDA (Food and Drug Administration) | FDA (Food and Drug Administration) |
|       | 試験値                                | 試験値                                |
|       | 試験値                                | 試験値                                |
|       | 試験値                                | 試験値                                |

| Material                           |
|------------------------------------|
| REACH/EC 1907/2006                 |
| EG 1935/2004                       |
| FDA (Food and Drug Administration) |

| Thermal Properties |          |          |             |
|--------------------|----------|----------|-------------|
| Material           | Material | Material | Material    |
| Material           | 175 °C   | Material | 260°C ±10°C |
| Material           | Material | Material | Material    |
| Material           | 120 sek. | Material | Material    |

BEHA Innovation GmbH • In den Engematten 16 • 79286 Glottertal • Tel. +49 7684 9070 • info@behabelt.com • www.behabelt.com


Material - 10/2026

## Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are oil and water resistant



Belts are cleanable



UV-C resistant



2-component belts




Belts are vegan



ISO 340 certified




Belts are flexible



Belts are long-lasting

## Applications

Belts are used in various applications:



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU belts