


□□□: □□□□□□ (SG)



000: 0000000 (ID)

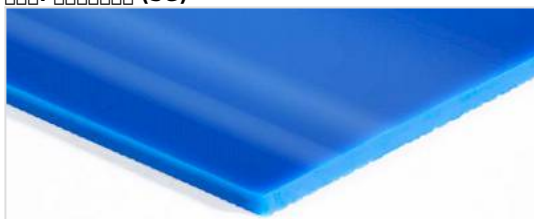

□□:
PU95A

FBFM750X2LC

Technische Daten			
Plattendicke	2 mm	Plattenbreite	2,4 kg/m²
Plattenhöhe	35 mm	Plattentemperatur	-30°...+60°C
Plattenabstand	0.5...3%	Plattenlänge	750 mm
1%Plattenabstand	0,98 N/mm	Plattenbreite	730 mm
1%Plattenabstand	0,68 N/mm	Plattenhöhe	35 mm

項目	規格	規格
硬度 (Shore A)	95° Shore A (±3)	95° Shore A (±3)
吸水率 (%)	0,45	0,25
密度 (g/cm³)	1,18 ± 0,02	1,18 ± 0,02
熱膨張係数 (ppm/°C)	n/a	n/a
耐熱性 (°C)	150 (SG)	150 (ID)
耐薬品性	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	耐薬品性	耐薬品性
	耐薬品性	耐薬品性
	耐薬品性	耐薬品性
	耐薬品性	MicroClean
		耐薬品性

REACH (EC 1907/2006)

EG 1935/2004

FDA (Food and Drug Administration)

[illegible][illegible]

□□□□□□□□□□□□□□ - 10/2026

BEHAbelt

BEHAbelt 提供多種規格之工業用皮帶，可滿足不同之需求。




符合FDA/EC標準



符合X光機安全標準，PU SAFE



具有防水功能




UV-C 耐光性



純素製品



多種規格之工業用皮帶



具有導電功能



具有抗菌功能




具有微細清潔功能



2K 雙組份系統




ISO 340 標準



多種規格之工業用皮帶

產品系列

提供多種規格之工業用皮帶

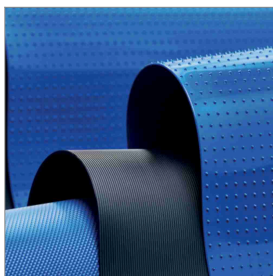


PU 及 TPE 工業用皮帶



PU 及 TPE 工業用皮帶



PU 及 TPE 工業用皮帶



多種規格之工業用皮帶



PU 工業用皮帶