



SG: Standard (SG)

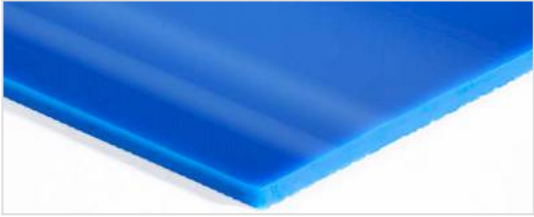

ID: Standard (ID)

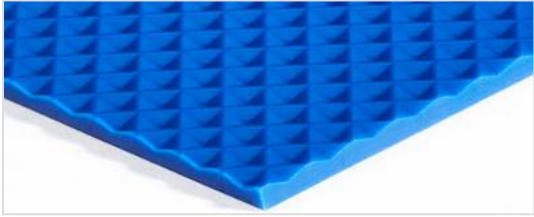

PU95A

FBFM750X3LC

SG: Standard (SG)

SG	SG
SG	3 mm
SG	50 mm
SG	0.5...3%
1%SG	1,47 N/mm
1%SG	1,03 N/mm

ID	ID
ID	3,6 kg/m²
ID	-30°...+60°C
ID	750 mm
ID	730 mm
ID	SG

SG	ID	ID
SG	95° Shore A (±3)	95° Shore A (±3)
SG	0,45	0,25
SG	SG	SG
SG	n/a	n/a
SG	SG (SG)	ID (ID)
SG	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	SG	SG
	SG	SG
	SG	SG
	SG	MicroClean
		SG

SG
REACH EC 1907/2006
EG 1935/2004
FDA (Food and Drug Administration)

00000000000000000000			
00000000		000000000000000000	
00000000000000	175 °C	0000 0000	260°C ±10°C
00			
0000	120 sek.		

SG: Standard (SG)


SG - 10/2026

Icons

BEHAbelt icons represent the various properties of the belts.




Belts are FDA/EC approved



Belts are static dissipative



Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



Belts are UV-C resistant



Belts are 2K (two-component) belts




Belts are vegan



Belts are ISO 340 certified




Belts are flexible



Belts are flexible

Applications

Belts are used in various applications.



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts