


□□□: □□□□□□ (SG)



□□□: □□□□□□ (ID)

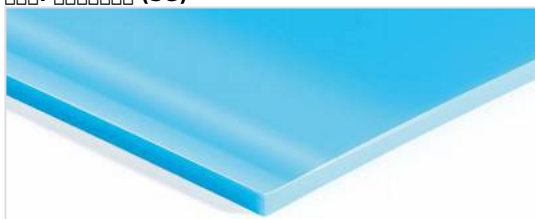

□□:
PU95A

FBFM750X2LD

Technische Daten			
Plattendicke	2 mm	Plattenbreite	2,4 kg/m²
Plattenhöhe	35 mm	Plattentemperatur	-30°...+60°C
Plattenabstand	0.5...3%	Plattenlänge	750 mm
1%Plattenabstand	0,98 N/mm	Plattenbreite	730 mm
1%Plattenabstand	0,68 N/mm	Plattenhöhe	35 mm

項目	規格	規格
硬度 (Shore A)	95° Shore A (±3)	95° Shore A (±3)
伸び率 (%)	0,45	0,25
密度 (g/cm³)	1,18 ± 0,02	1,18 ± 0,02
透過率 (%)	n/a	n/a
試験方法	ASTM D2240 (SG)	ASTM D2240 (ID)
承認機関	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	ISO 9001	ISO 9001
	ISO 13485	ISO 13485
	RoHS 2.0	RoHS 2.0
	REACH	MicroClean
		RoHS 2.0

REACH (EC 1907/2006)

EG 1935/2004

FDA (Food and Drug Administration)

[illegible][illegible]


□□□□□□□□□□□□□□ - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.



Belts are FDA/EC approved



Belts are static dissipative



Belts are X-ray safe (PU SAFE)



Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



Belts are UV-C resistant



Belts are 2K (two-component) belts




Belts are vegan



Belts are ISO 340 certified




Belts are flexible



Belts are flexible

Applications

BEHA belts are used in various applications.

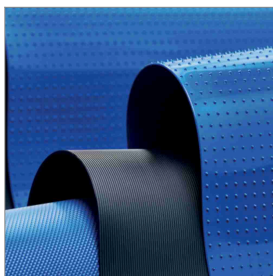

PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU belts