




SG: SG (SG)



ID: ID (ID)

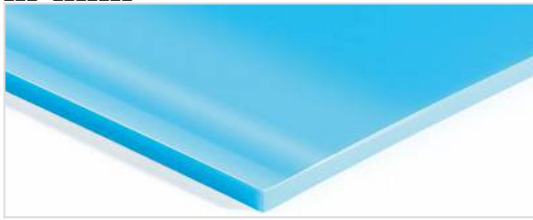

PU95A

FBFM750X3LD



SG (Smooth Groove)

SG	SG
SG	3 mm
SG	50 mm
SG	0.5...3%
1%SG	1,47 N/mm
1%SG	1,03 N/mm

SG	SG
SG	3,6 kg/m²
SG	-30°...+60°C
SG	750 mm
SG	730 mm
SG	SG

SG	ID	ID
SG	95° Shore A (±3)	95° Shore A (±3)
SG	0,45	0,25
SG	SG	SG
SG	n/a	n/a
SG	SG (SG)	ID (ID)
SG	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	SG	SG
	SG	SG
	SG	SG
	SG	MicroClean
		SG

SG
REACH EC 1907/2006
EG 1935/2004
FDA (Food and Drug Administration)

ID	ID
SG	SG
SG	175 °C
SG	260°C ±10°C
SG	120 sek.

BEHA Innovation GmbH • In den Engematten 16 • 79286 Glottertal • +49 7684 9070 • info@behabelt.com • www.behabelt.com

10/2026

BEHAbelt

BEHAbelt 提供多種規格之工業用橡膠帶，適用於各種工業應用。




符合FDA/EC標準



符合X光機安全標準，不含鉛，PU SAFE



具有優異之防水性能




UV-C 抗紫外線



純素製品



可彎曲橡膠帶



具有優異之導電性能



具有優異之抗菌性能




具有優異之清潔性能



2K 雙組份橡膠帶




ISO 340 標準



可彎曲橡膠帶

產品系列

提供多種規格之工業用橡膠帶




PU 及 TPE 橡膠帶



PU 及 TPE 橡膠帶



PU 及 TPE 橡膠帶



三角帶及 PU 橡膠帶



PU 橡膠帶