


□□□: □□□□□□ (ID)



□□□: □□□□□□ (ID)

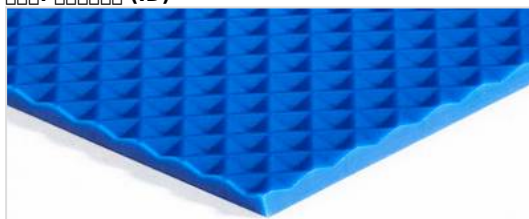

□□:
PU65A

FBFGG750X22L

Technische Daten			
Material	Alu-Mg-Si	Material	Alu-Mg-Si
Stärke	2,2 mm	Dichte	2,64 kg/m³
Stärke	15 mm	Temperaturbereich	-30°C...+40°C
Stärke	1...5%	Stärke	750 mm
1%Stärke	0,28 N/mm	Stärke	730 mm
1%Stärke	0,2 N/mm	Stärke	Stärke

項目	規格	規格
硬度 (Shore A)	72° Shore A (±3)	72° Shore A (±3)
伸び率 (%)	0,65	0,65
密度 (g/cm³)	1,18 ± 0,02	1,18 ± 0,02
引張強度 (MPa)	n/a	n/a
伸び (mm/mm)	0,15 (ID)	0,15 (ID)
耐熱性 (°C)	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
耐薬品性	耐薬品	耐薬品
耐油性	耐油性	耐油性
耐腐食性	耐腐食性	耐腐食性
UV耐性	UV耐性	UV耐性
耐摩耗性	耐摩耗性	耐摩耗性
耐老化性	MicroClean	MicroClean

REACH (EC 1907/2006)

EG (1935/2004)

FDA (Food and Drug Administration)

[illegible][illegible]


00000000000000000000 - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



UV-C resistant



2-component belts




Belts are vegan



ISO 340 certified




Belts are flexible



Belts are flexible

Applications

Belts are used in various applications.



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU belts