


□□□: □□□□□ (ID)



000: 000000 (ID)

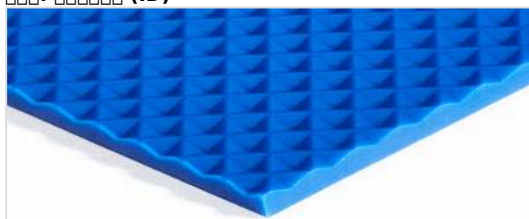

□□:
PU80A

□□:
FBFJ750X22LO

Technische Daten			
Material	Aluminium	Farbe	Anthrazit
Stärke	2,2 mm	Gewicht	2,64 kg/m²
Profilhöhe	22 mm	Temperaturbereich	-20°C...+60°C
Verpackungseinheit	1...5%	Standardlänge	750 mm
1% Bruchdehnung	0,6 N/mm	Standardbreite	730 mm
1% Bruchdehnung	0,42 N/mm	Standarddicke	2,2 mm

項目	標準	結果
温度	84° Shore A (±3)	84° Shore A (±3)
湿度	0,5	0,5
時間	1時間	1時間
洗浄液	n/a	n/a
洗浄方法	超音波洗浄 (ID)	超音波洗浄 (ID)
洗浄装置	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	洗浄剤	洗浄剤
	MicroClean	MicroClean

REACH/EC 1907/2006
EG 1935/2004
FDA (Food and Drug Administration)

Übersicht			
Temperaturbereich		Temperaturbereich	
Minimale Temperatur	160 °C	Maximale Temperatur	260°C ±10°C
Druck	0,5 bar		
Dauer	90 sek.		

[illegible]


□□□□□□□□□□□□□□ - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



Belts are UV-C resistant



Belts are 2K (two-component) belts




Belts are vegan



Belts are ISO 340 certified




Belts are flexible



Belts are flexible

Applications

Belts are used in various applications.



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU belts