




BEHA: BEHA (ID)



BEHA: BEHA (ID)

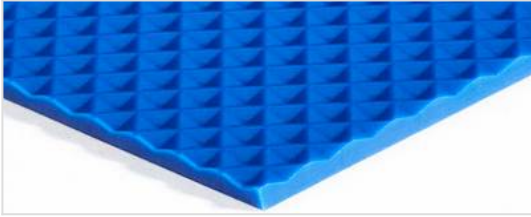

BEHA: **PU65A / PU80A**

BEHA: **FBFJG750X22L**

BEHA: BEHA (ID)

BEHA	BEHA	BEHA	BEHA 2000000000
BEHA	2,2 mm	BEHA	2,64 kg/m ²
BEHA	18 mm	BEHA	-20°C...+60°C
BEHA	1...5%	BEHA	750 mm
1% BEHA	0,44 N/mm	BEHA	730 mm
1% BEHA	0,31 N/mm	BEHA	BEHA

BEHA	BEHA	BEHA
BEHA	72° Shore A (±3)	84° Shore A (±3)
BEHA μ	0,65	0,5
BEHA	BEHA	BEHA
BEHA	BEHA (ID)	1,2 mm
BEHA	FDA (Food and Drug Administration)	BEHA (ID)
BEHA	BEHA	FDA (Food and Drug Administration)
	UV	UV
	MicroClean	MicroClean

BEHA	BEHA
REACH EC 1907/2006	BEHA
EG 1935/2004	BEHA
FDA (Food and Drug Administration)	BEHA
BEHA	BEHA
BEHA	150/165 °C
BEHA	0,5 bar
BEHA	90 sek.

BEHA: BEHA (ID)


BEHA: BEHA (ID) - 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative



Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



UV-C resistant



2-component belts




Belts are vegan



ISO 340 certified




Belts are flexible



Belts are flexible

Applications

Belts are used in various applications.

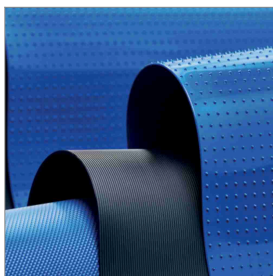

PU and TPE belts



PU and TPE belts



PU and TPE belts



PU and TPE belts



PU belts