





Material: ID

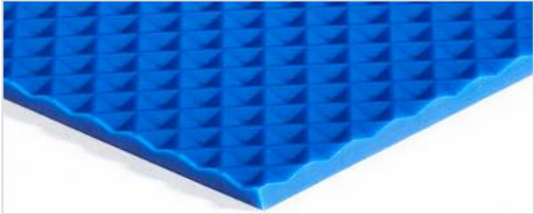

Material: FI

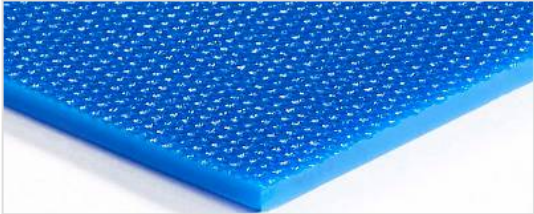

Material: PU95A

Material: FBFM750X16LH

Mechanical Properties			
Material	Thickness	Density	Temperature Range
Material	1,6 mm	1,92 kg/m ²	-20°C...+60°C
Material	25 mm		
Material	0.5...3%		
1% Elongation	0,78 N/mm		
1% Elongation	0,55 N/mm		

Physical Properties		
Material	Shore A (±3)	Shore A (±3)
Material	0,25	0,3
Material	Material	Material
Material	n/a	n/a
Material	ID	FI
Material	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
Material	Material	Material
Material	MicroClean	

Regulatory Compliance
REACH EC 1907/2006
EG 1935/2004
FDA (Food and Drug Administration)

Thermal Properties			
Material	Material	Material	Material
Material	175 °C	Material	260°C ±10°C
Material			
Material	60 sek.		

BEHA Innovation GmbH is not responsible for the use of the material in applications where the material is not intended for use. The user is responsible for the correct use of the material.

Version: 10/2026

BEHAbelt

BEHAbelt 提供多種規格之工業用橡膠帶，適用於各種工業應用。




符合FDA/EC標準



符合X光機安全標準，適用於醫療設備PU SAFE



具有優異之防水性能




UV-C光線保護



純素製品



具有優異之彎曲性能



具有優異之導電性能



具有優異之抗菌性能




具有優異之清潔性能



2K雙組份系統




ISO 340標準



具有優異之彎曲性能

產品系列

提供多種規格之工業用橡膠帶




PU及TPE工業用橡膠帶



PU及TPE工業用橡膠帶



PU及TPE工業用橡膠帶



具有優異之彎曲性能之PU工業用橡膠帶



PU工業用橡膠帶