




ID: ID (ID)



FI: FI (FI)

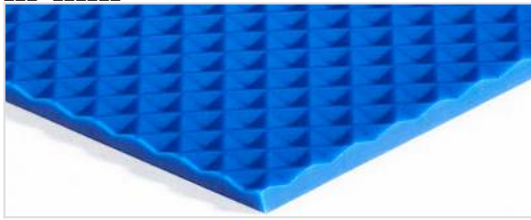

PU95A

FBFM750X3LH

Technical Data

Material	Material	Material	Material
Thickness	3 mm	Weight	3,6 kg/m²
Width	50 mm	Temperature range	-20°C...+60°C
Porosity	0.5...3%	Length	750 mm
1% Porosity	1,47 N/mm	Width	730 mm
1% Porosity	1,03 N/mm	Material	Material

Property	Value	Value
Shore A (±3)	95° Shore A (±3)	95° Shore A (±3)
μ	0,25	0,3
Material	Material	Material
n/a	n/a	n/a
ID	ID (ID)	FI (FI)
FDA (Food and Drug Administration)	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
MicroClean	MicroClean	MicroClean

REACH EC 1907/2006
EG 1935/2004
FDA (Food and Drug Administration)

Property	Value	Value
Temperature	175 °C	260°C ±10°C
Time	120 sek.	

BEHA Innovation GmbH is a company of the BEHA Group. The BEHA Group is a leading manufacturer of medical devices and components. The BEHA Group is a leading manufacturer of medical devices and components. The BEHA Group is a leading manufacturer of medical devices and components.


BEHA Innovation GmbH - 10/2026

Icons

BEHAbelt icons represent the various properties and features of our products.




Complies with FDA/EC standards



Electrostatic discharge (ESD) protection



Complies with X-ray standards (X-ray safe) PU SAFE




Antibacterial properties



Waterproof



Micro Clean (hygienic)



UV-C resistant



2K (two-component) system




Vegan



ISO 340 (food grade)




Flexible



Flexible

Applications

BEHAbelt products are used in various applications:

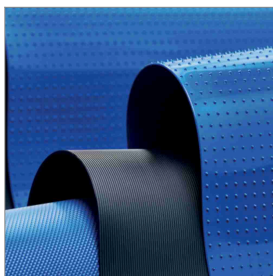

PU and TPE conveyor belt



PU and TPE components



PU and TPE connector



PU and TPE V-belt



PU and TPE gear