




Material: **NPU**



Material: **FI**

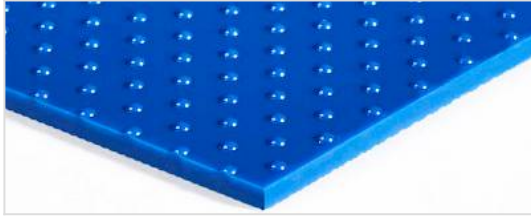

Shore A:
PU80A

Dimensions:
FBFJ750X20LF

Technical Data

Material	Material	Material	Material
Thickness	2 mm	Weight	2,4 kg/m ²
Width	20 mm	Temperature range	-20°C...+60°C
Compression set	1...5%	Length	750 mm
1% Modulus	0,6 N/mm	Width	730 mm
1% Modulus	0,42 N/mm	Material	Material

Material	Material	Material
Shore A (±3)	84° Shore A (±3)	84° Shore A (±3)
μ	n/a	0,5
Material	Material	Material
n/a	n/a	n/a
Material	Material	Material
FDA (Food and Drug Administration)	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
Material	Material	Material
MicroClean		

Material	Material	Material
REACH EC 1907/2006	Material	Material
EG 1935/2004	Material	Material
FDA (Food and Drug Administration)	Material	Material
Material	Material	Material
Material	Material	Material
Material	Material	Material

The information provided in this document is for informational purposes only and does not constitute a contract. The user is responsible for ensuring that the material is used in accordance with the intended application and the relevant safety instructions.


Date of issue: 10/2026

Icons

BEHAbelt icons represent various properties and certifications of the belts.




Belts are FDA/EC approved



Belts are static dissipative




Belts are X-ray safe (PU SAFE)




Belts are microorganism resistant



Belts are water resistant



Belts are micro clean



UV-C resistant



2-component system




Belts are vegan



ISO 340 certified




Belts are flexible



Belts are flexible

Applications

Belts are used in various applications.



PU and TPE belts



PU and TPE belts



PU and TPE belts



V-belt PU



PU belts